

DTI 516 Multimedia Processing

Chapter: 1

Human visual perception

And

Image Acquisition


Dr. Paween Khoenkaw

Digital Technology Innovation : Maejo University

Download slide @ <http://www.drpaween.com>



What is image processing ?

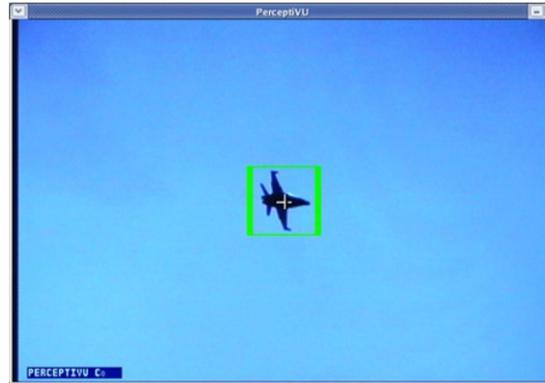

Input = ?
Output = ?

The universe of digital imagery

Parameter




Computer Graphics



Image



24.4.2014				
JN794E				
2748201A	59 001	54 06 0	202018	224
9 04 0M2AL	59 002	59 035	2022 NR	173
9 04 0K2K3T	59 003	59 015	2029 A2	32
9 02 0K2K4K	59 004	59 022	2029 NB	537
9 16 9A2LX	59 005	77 023	2029 DM	340
9 12 0K2CA8	59 006	79 025	2029 A1	209
10 0M2 IV	59 007	59 022	2028 SP	299
12 0K2E0W	59 008	59 015	2029 IE	299
14 5P0DSD	59 009	59 015	2029 KB	299
21 0M2UU	59 010	59 012	2029 UL	227
28 0K1C3H	59 011	59 012	2029 KB	299
31 0K1XQ	59 012	59 066	2029 PM	269
33 0K5TM	59 013	59 050	2029 CA	183
35 0K123V	59 014	59 014	2029 IR	199
37 0K1KFM	59 015	59 014	2029 VU	280
40 5570	59 016	59 012	2029 DT	337

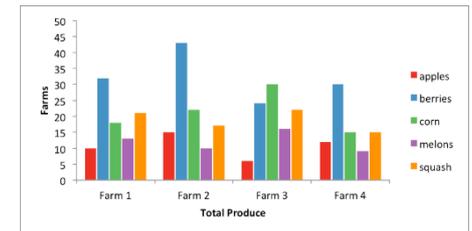

computer graphics



The universe of digital imagery

Image



The universe of digital imagery



computer graphics



1กท 6737

The universe of digital imagery




CS 462

In imaging science, **image processing** is processing of images using mathematical operations by using any form of signal processing for which the input is an image, such as a photograph or video frame; the output of image processing may be either an image or a set of characteristics or parameters related to the image



We percept image through our eyes

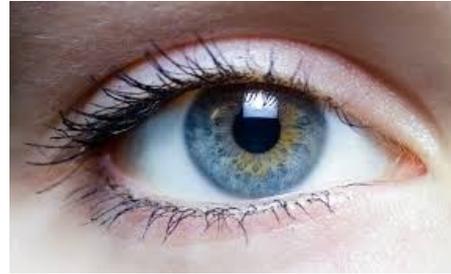


Our eyes sense light




Percept image = Percept light

stimulierte Emission:






spontane Emission:

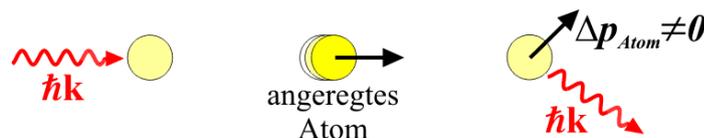


What is light




- Electromagnetic radiation that is visible to the human eye
- Can be wave or particle

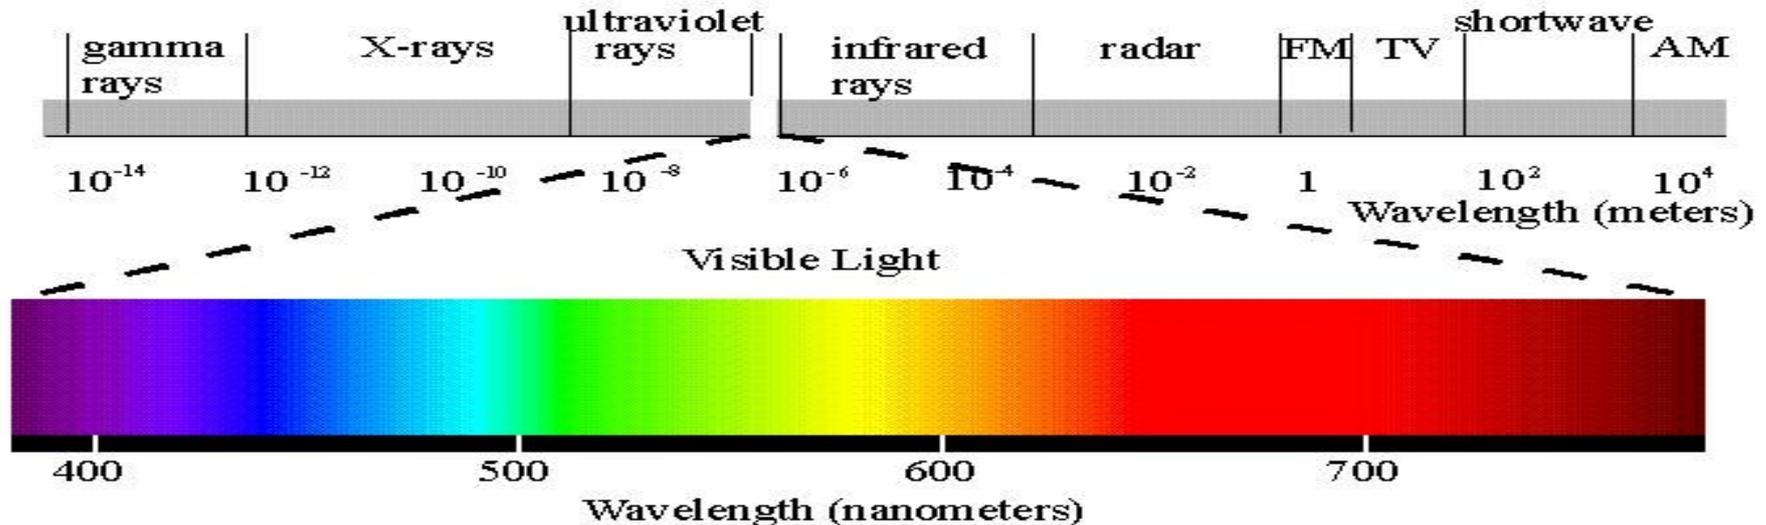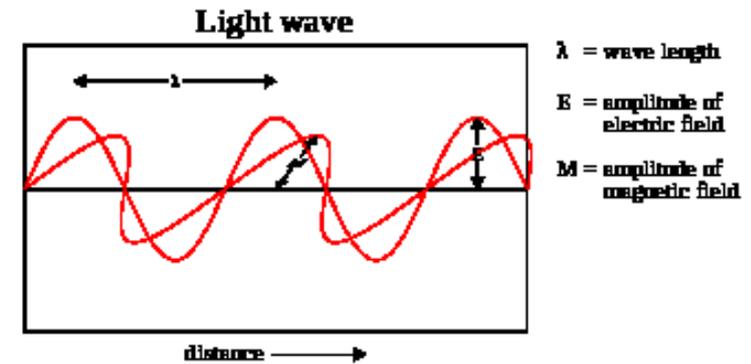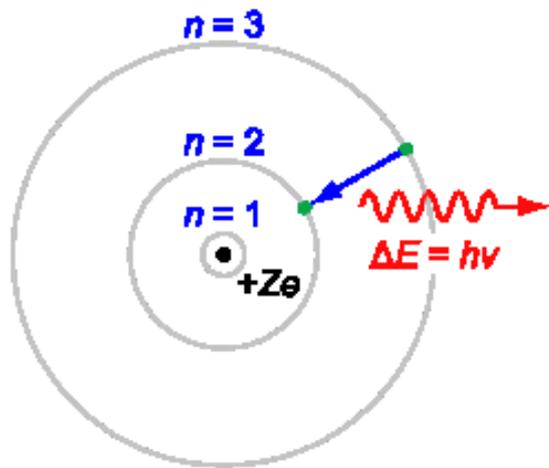


How eye works (Photoreceptor)

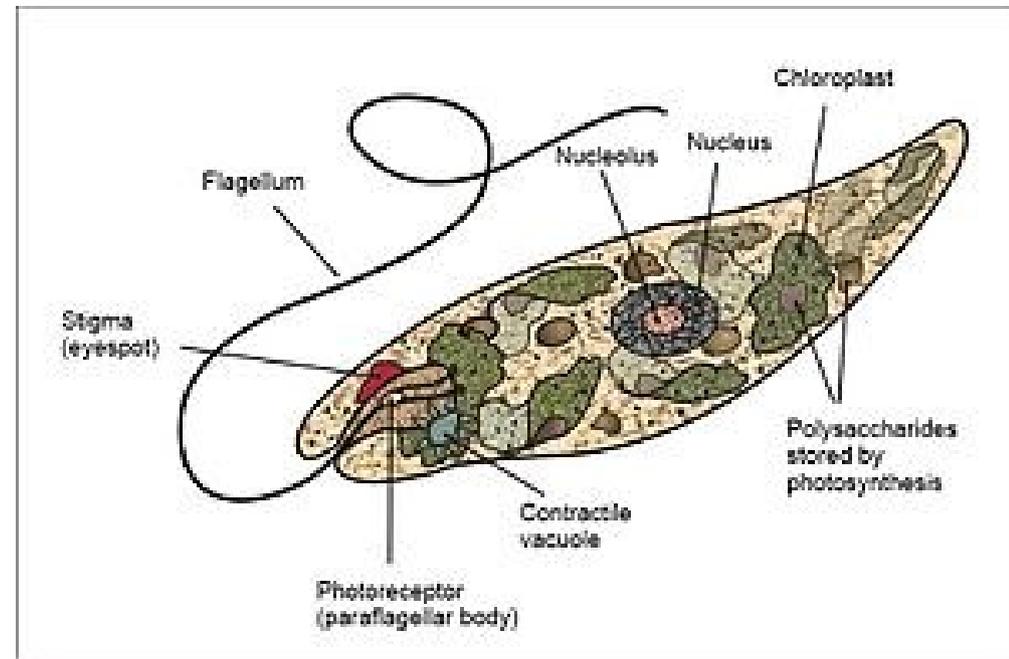

Euglena

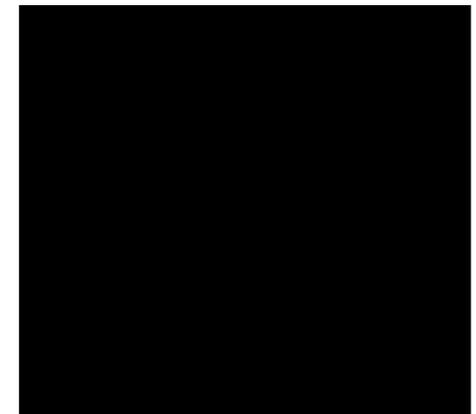

How eye works (Photoreceptor)

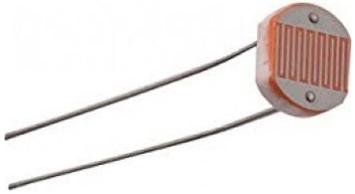

Light Dependent Resistor




Photo Transistor




Passive InfraRed sensor




How eye works (Eye cup)

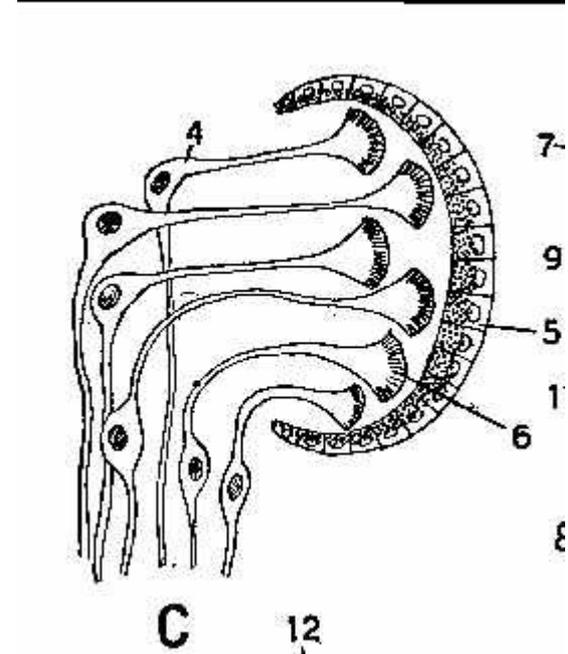

Planarian

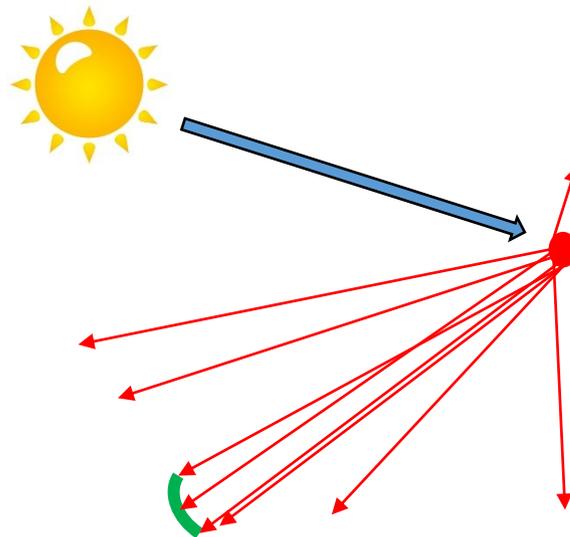


How eye works (Eye cup)

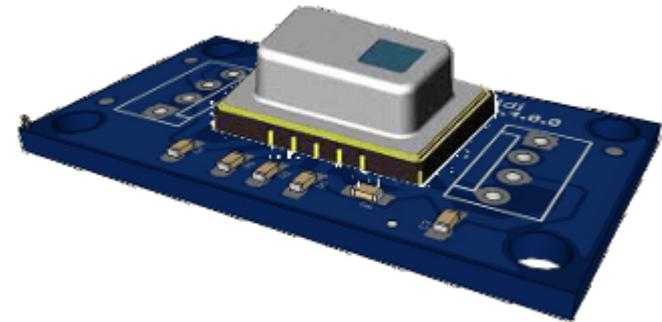


8x8 PIR sensor array


How eye works (Pinhole)

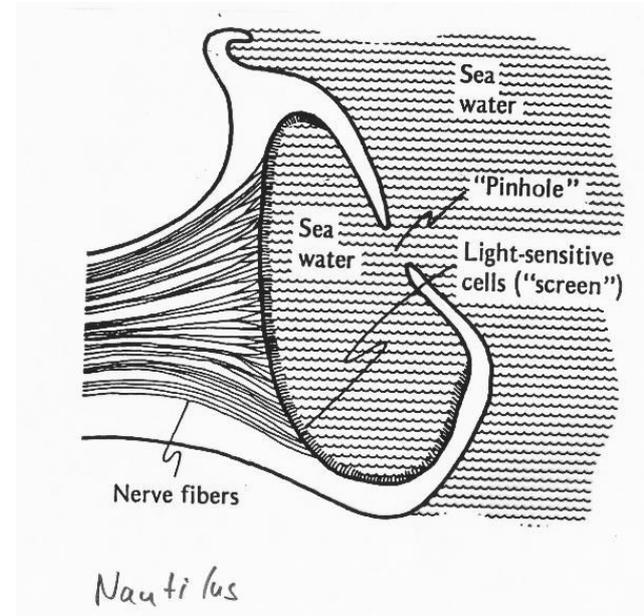


Nautilus belauensis

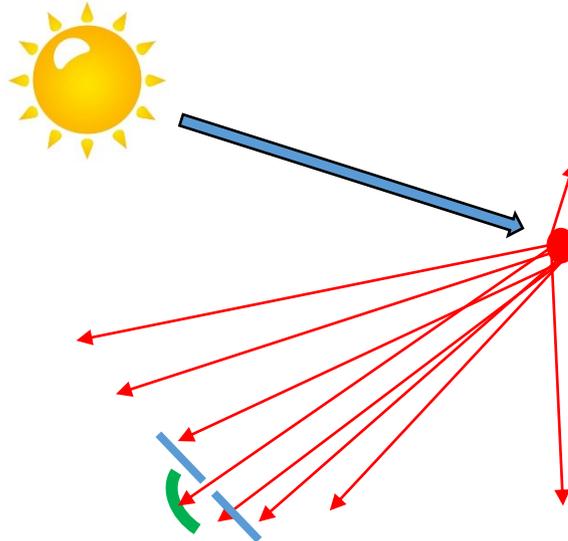


How eye works (Pinhole)

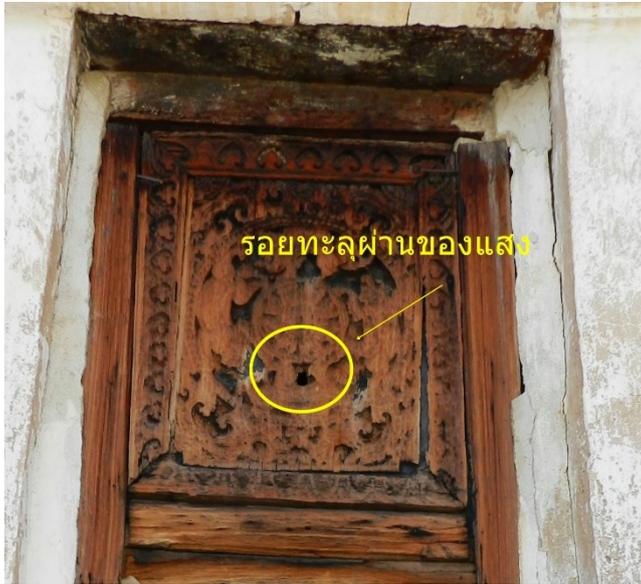


How eye works (Lens)

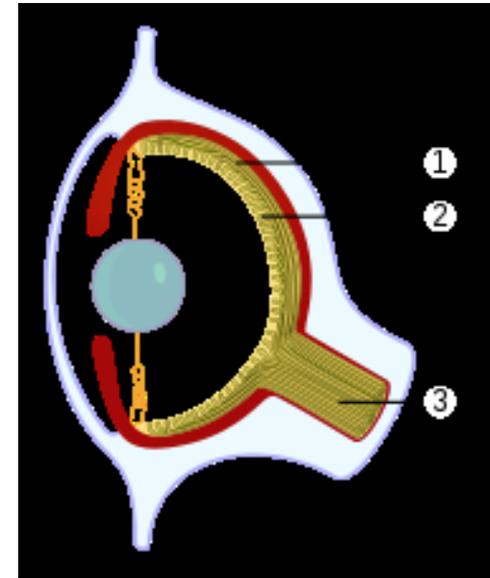


Octopus

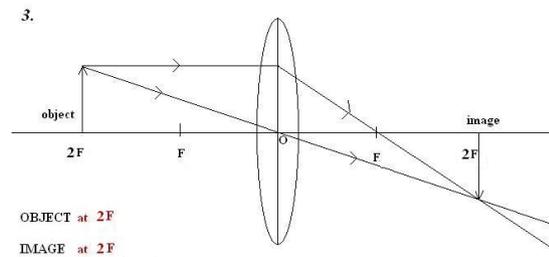

How eye works (Lens)

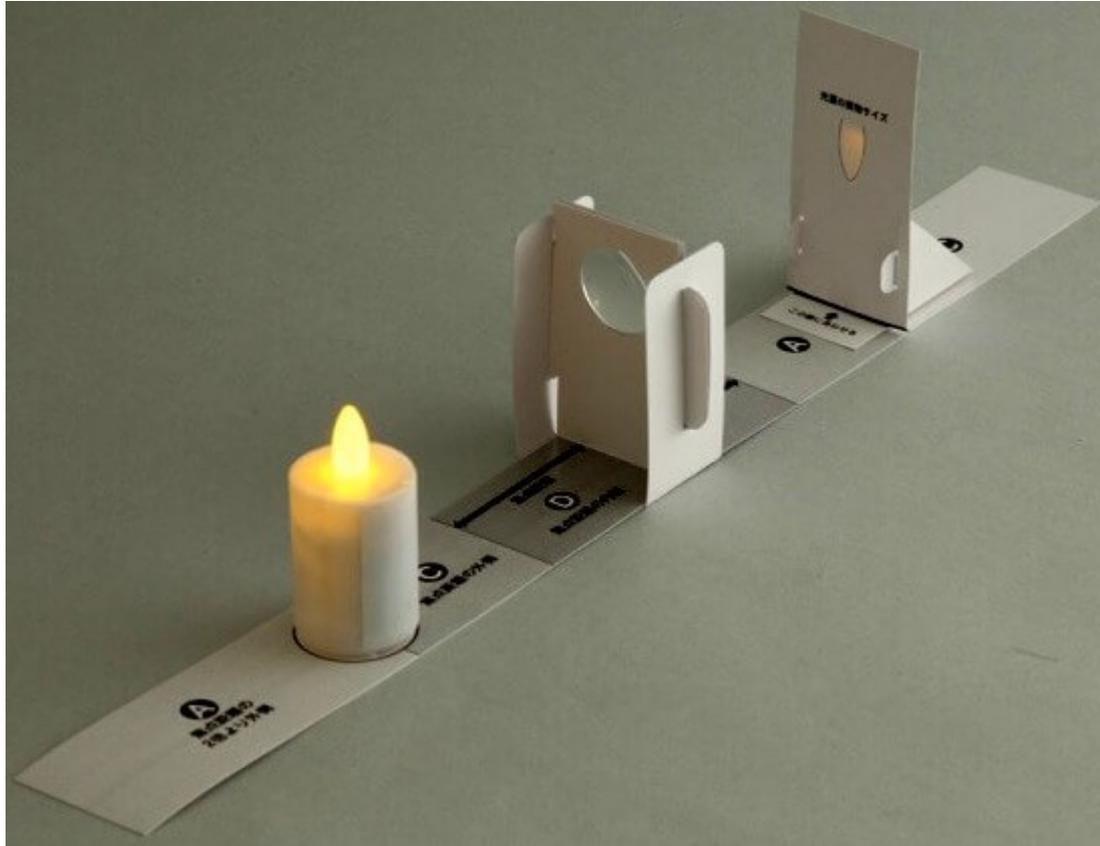

How eye works (Foveated Imaging)

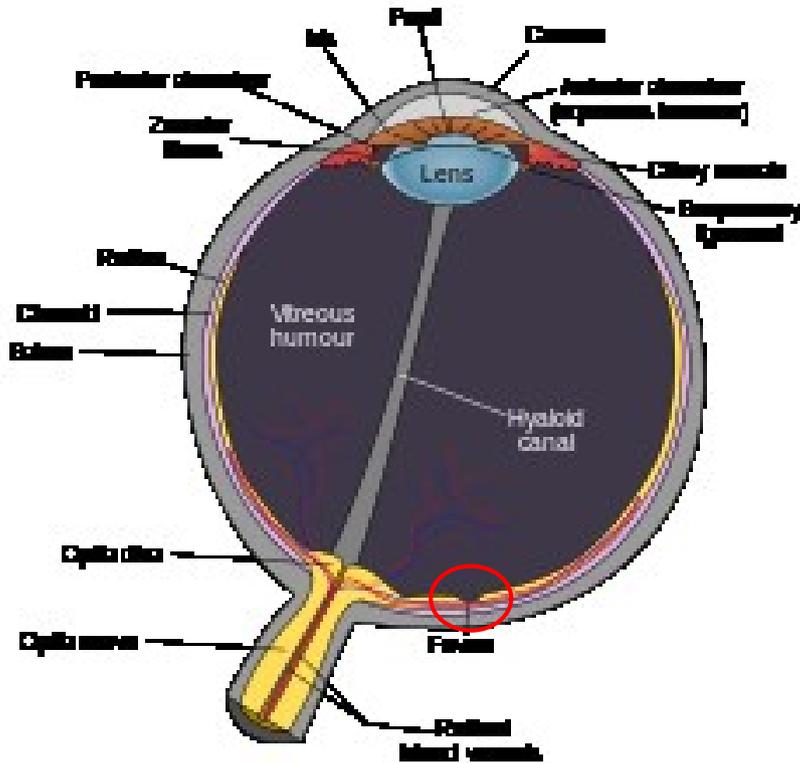



Human eye



Image formed

Foveated Imaging

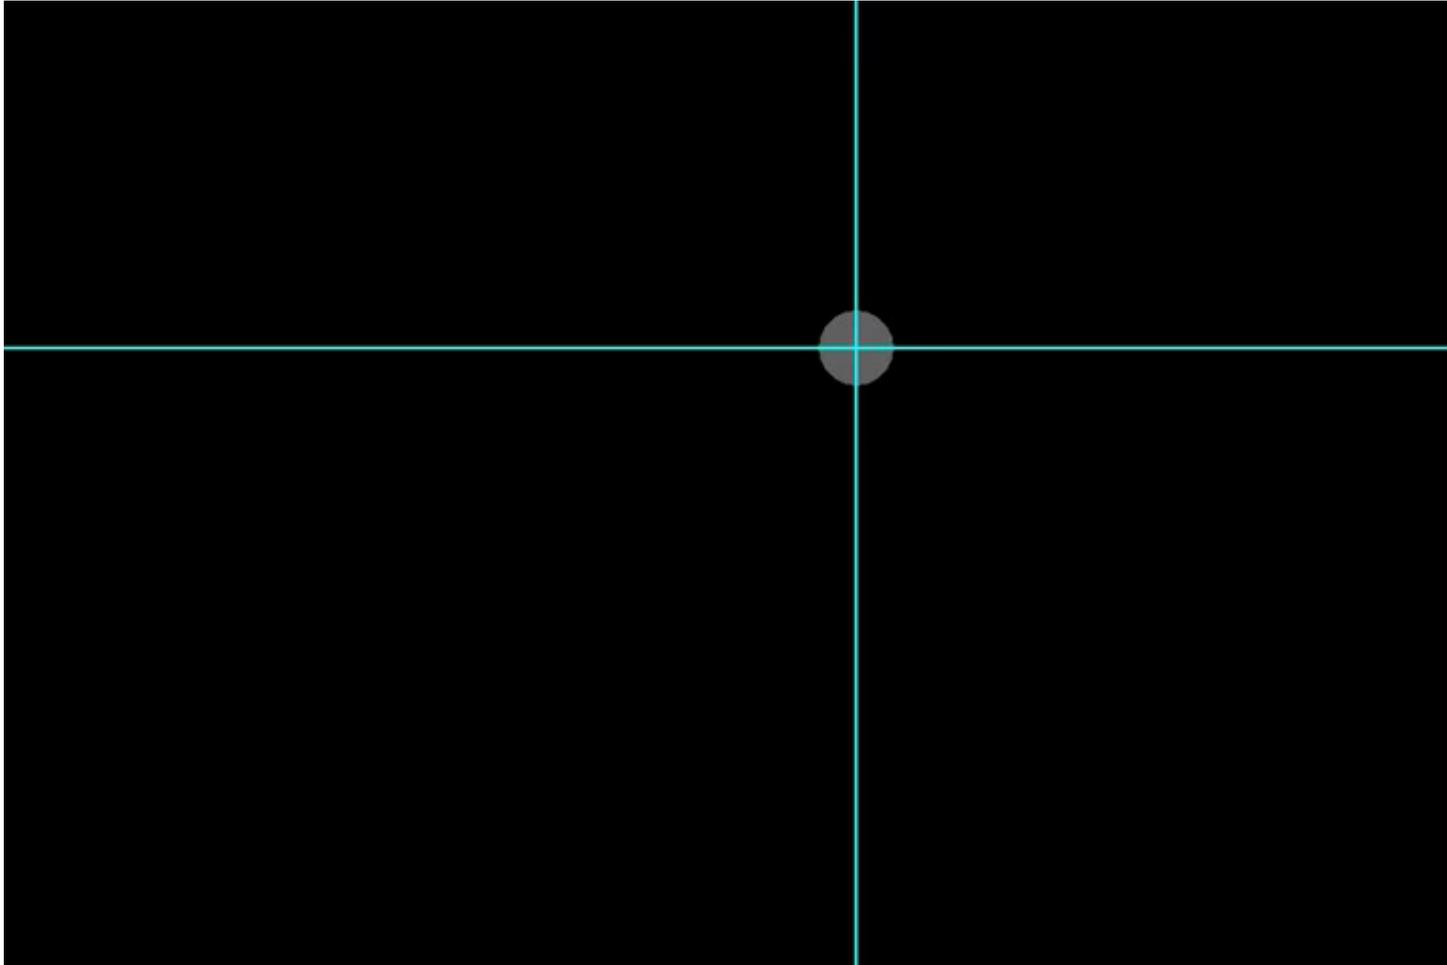




Digital Image Processing, 3rd ed.

Gonzalez & Woods

www.ImageProcessingPlace.com


Chapter 2 Digital Image Fundamentals

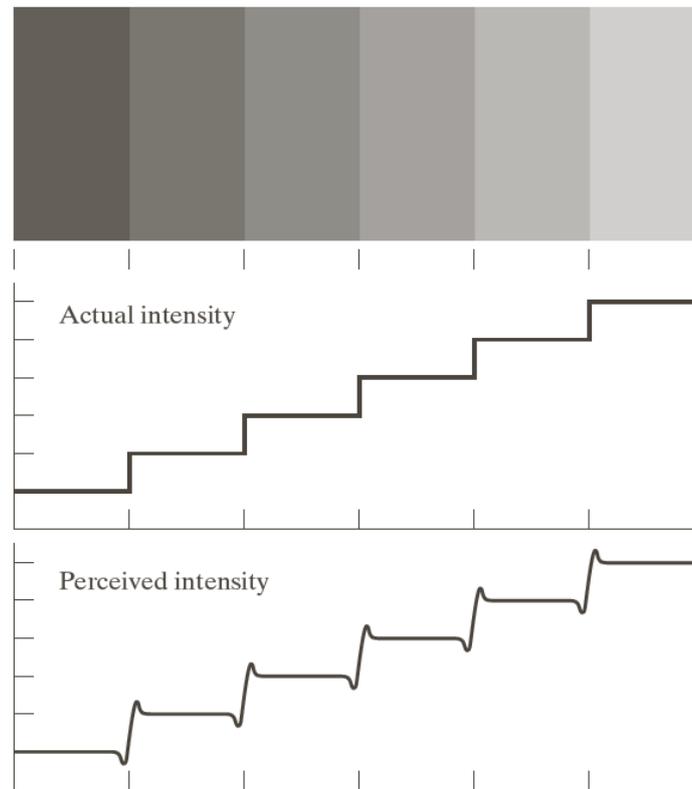

a
b
c

FIGURE 2.7

Illustration of the Mach band effect. Perceived intensity is not a simple function of actual intensity.



Digital Image Processing, 3rd ed.

Gonzalez & Woods


www.ImageProcessingPlace.com

Chapter 2 Digital Image Fundamentals



a b c

FIGURE 2.8 Examples of simultaneous contrast. All the inner squares have the same intensity, but they appear progressively darker as the background becomes lighter.



Digital Image Processing, 3rd ed.


Gonzalez & Woods


www.ImageProcessingPlace.com

Chapter 2 Digital Image Fundamentals

a b
c d

FIGURE 2.9 Some well-known optical illusions.

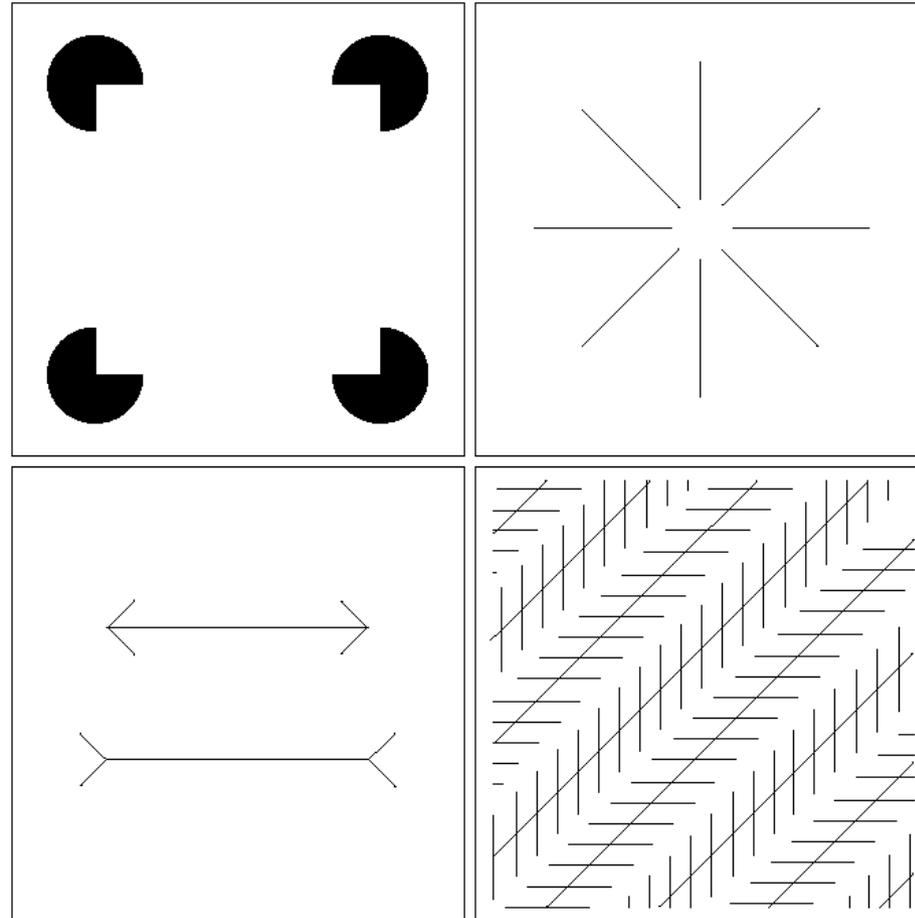



Digital Image Processing, 3rd ed.

Gonzalez & Woods

www.ImageProcessingPlace.com

Chapter 2 Digital Image Fundamentals



FIGURE 1.1 A digital picture produced in 1921 from a coded tape by a telegraph printer with special type faces. (McFarlane.[†])



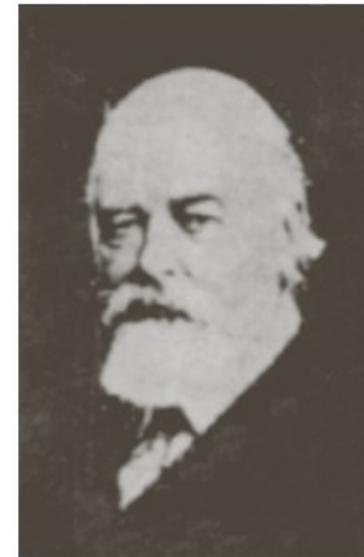


FIGURE 1.2 A digital picture made in 1922 from a tape punched after the signals had crossed the Atlantic twice. (McFarlane.)

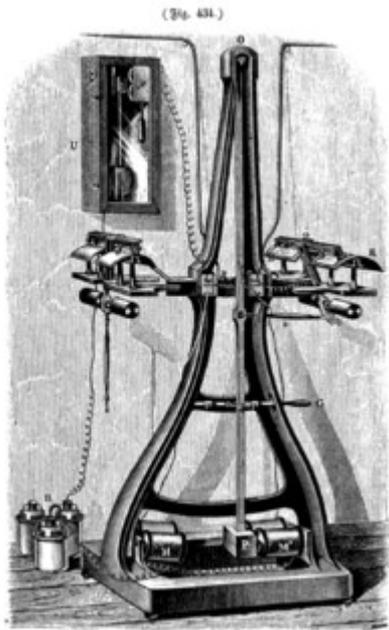

Giovanni Caselli's pantelegraph



Digital Image Processing, 3rd ed.

Gonzalez & Woods


www.ImageProcessingPlace.com

Chapter 2 Digital Image Fundamentals





FIGURE 1.3
Unretouched
cable picture of
Generals Pershing
and Foch,
transmitted in
1929 from
London to New
York by 15-tone
equipment.
(McFarlane.)

Video camera tube

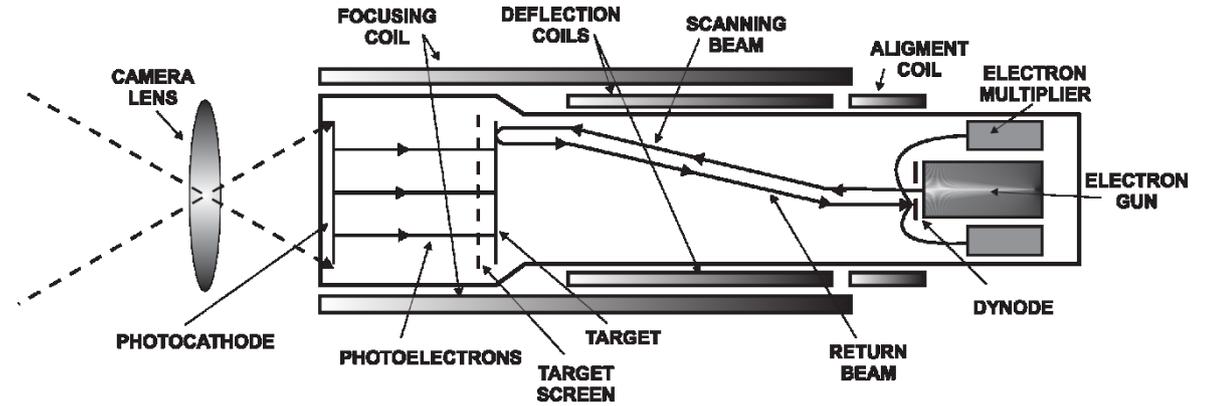

Vidicon tube

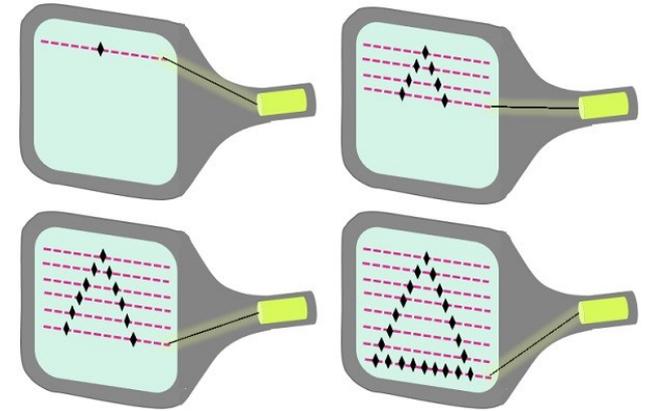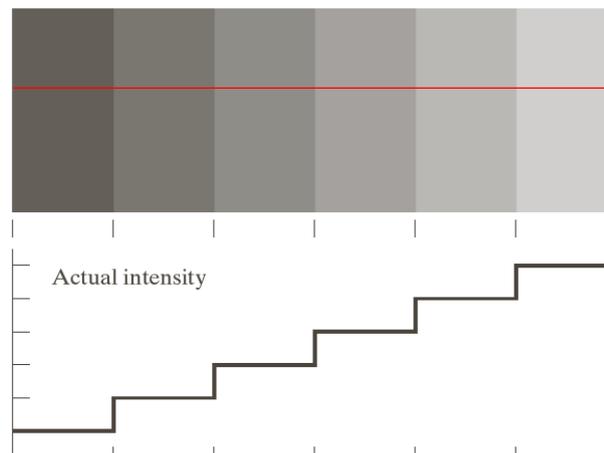

Raster Scan: A raster scan system displays an item as a group of separate points along each screen line


The first digital scanned image





Russell A. Kirsch





The first photographs scanned in 1957, a picture of Kirsch's three-month-old son, was captured as just 30,976 pixels, a 176×176 array, in an area measuring 5 cm \times 5 cm.

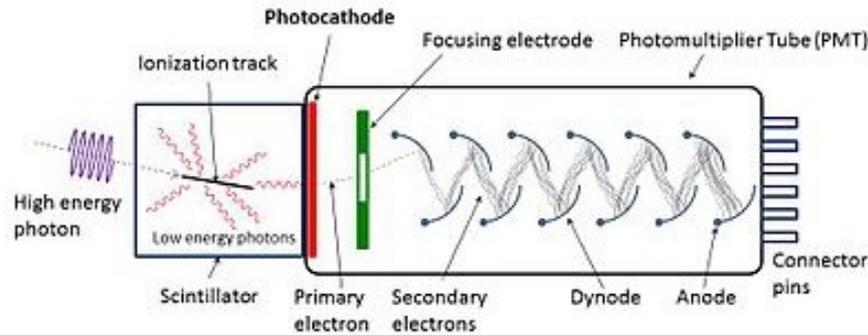


Photomultiplier tubes

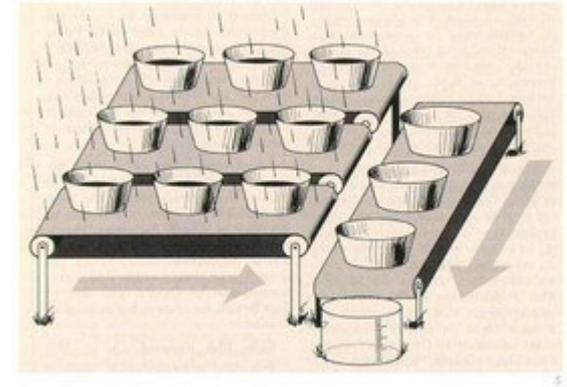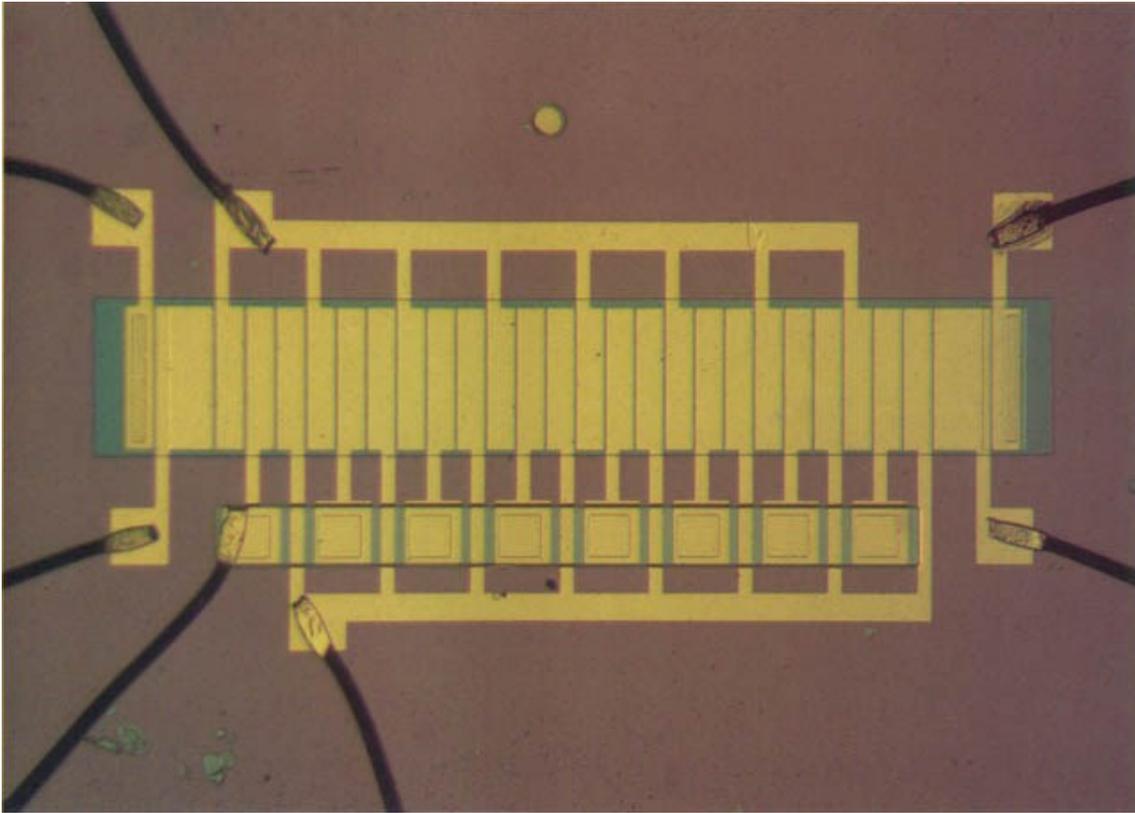

The first 8-bit CCD, this chip consists of twenty-four closely packed MOS capacitors (the narrow rectangles in the football-field-like grid in the center). The thick rectangles at either end of the grid are input/output terminals. This chip can detect and reproduce simple images, like the letters CCD. Today's CCDs can store up to 64K bits of data. Actual size: 0.060 x 0.100 inches.

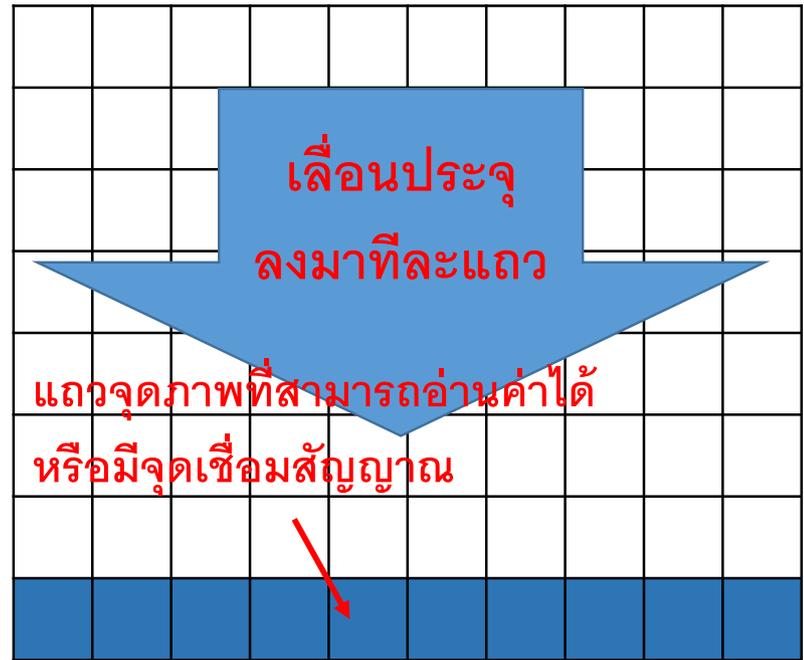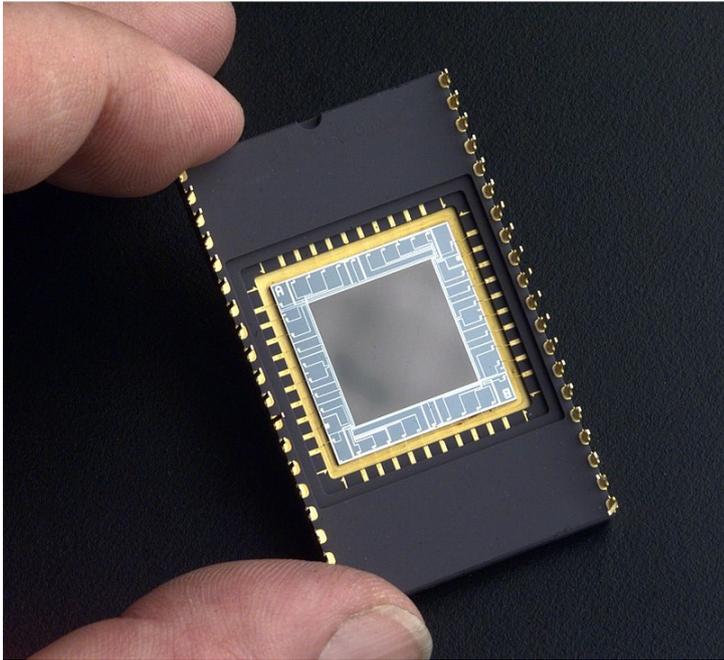

Digital Camera

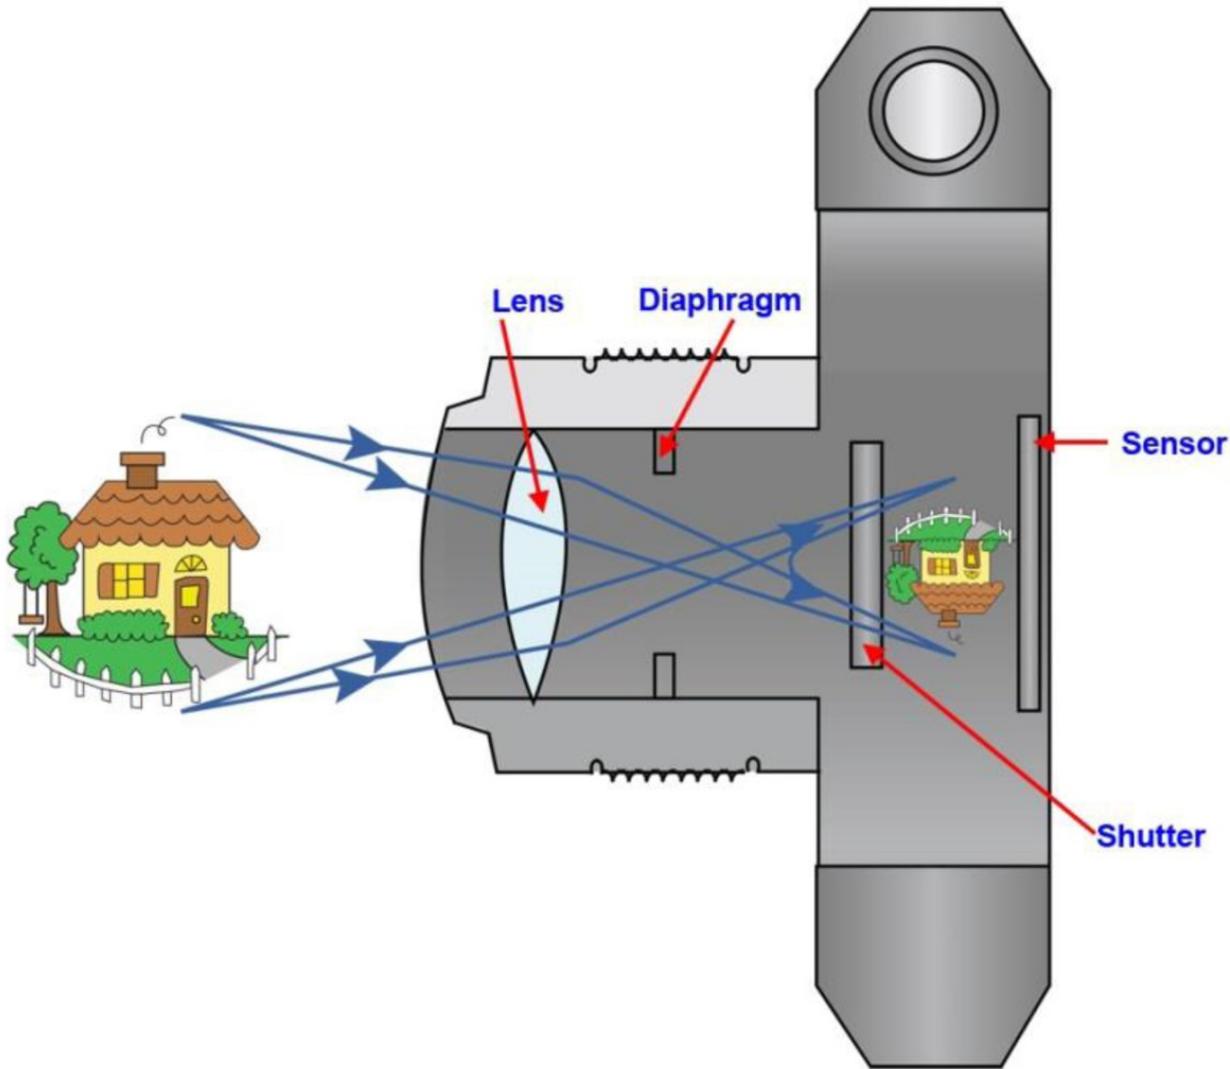

Camera body

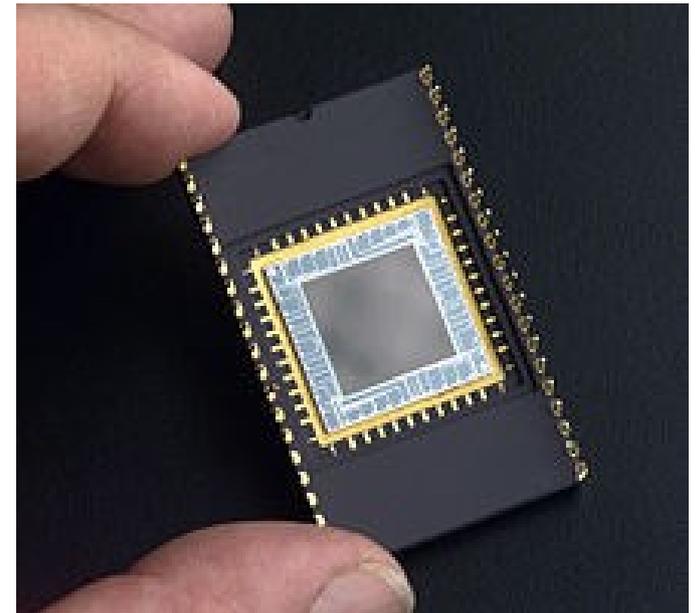


Image Sensor



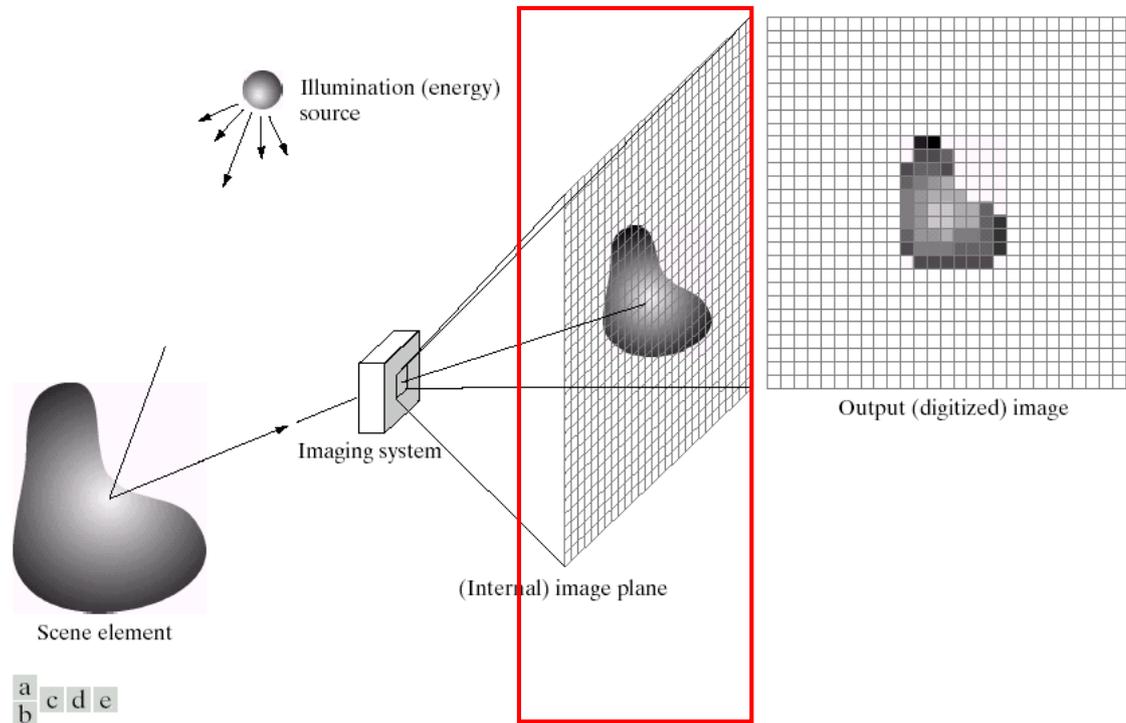


FIGURE 2.15 An example of the digital image acquisition process. (a) Energy (“illumination”) source. (b) An element of a scene. (c) Imaging system. (d) Projection of the scene onto the image plane. (e) Digitized image.

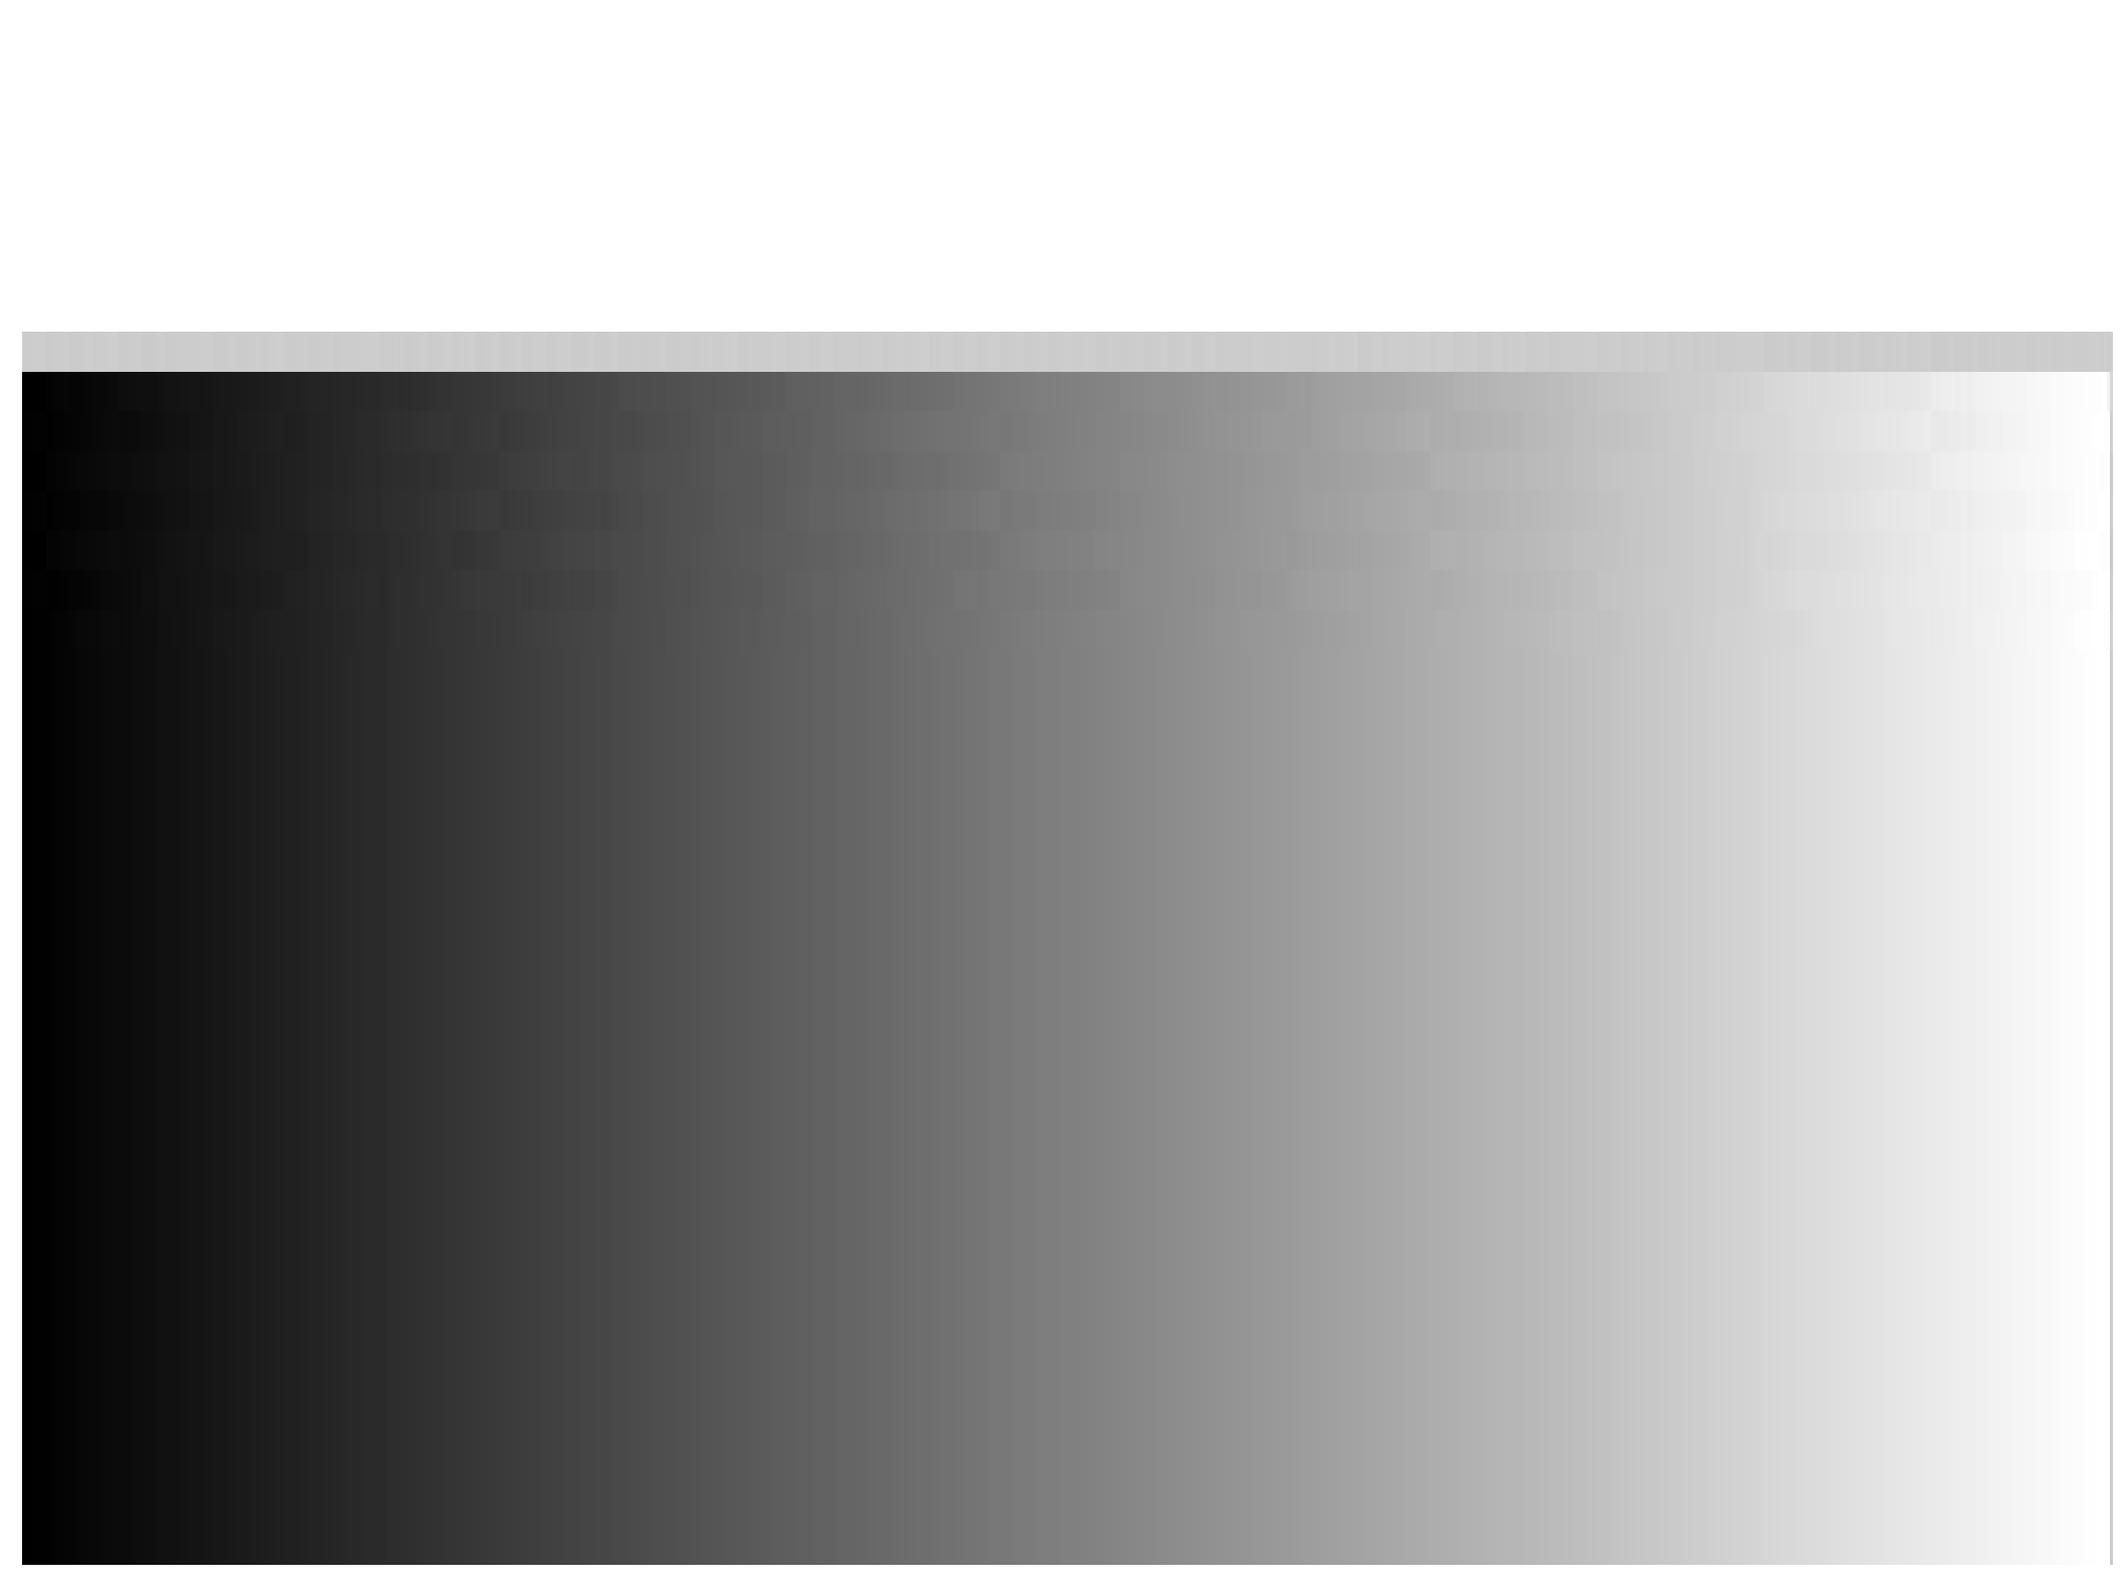

Digital Camera


Basic structure of a digicam

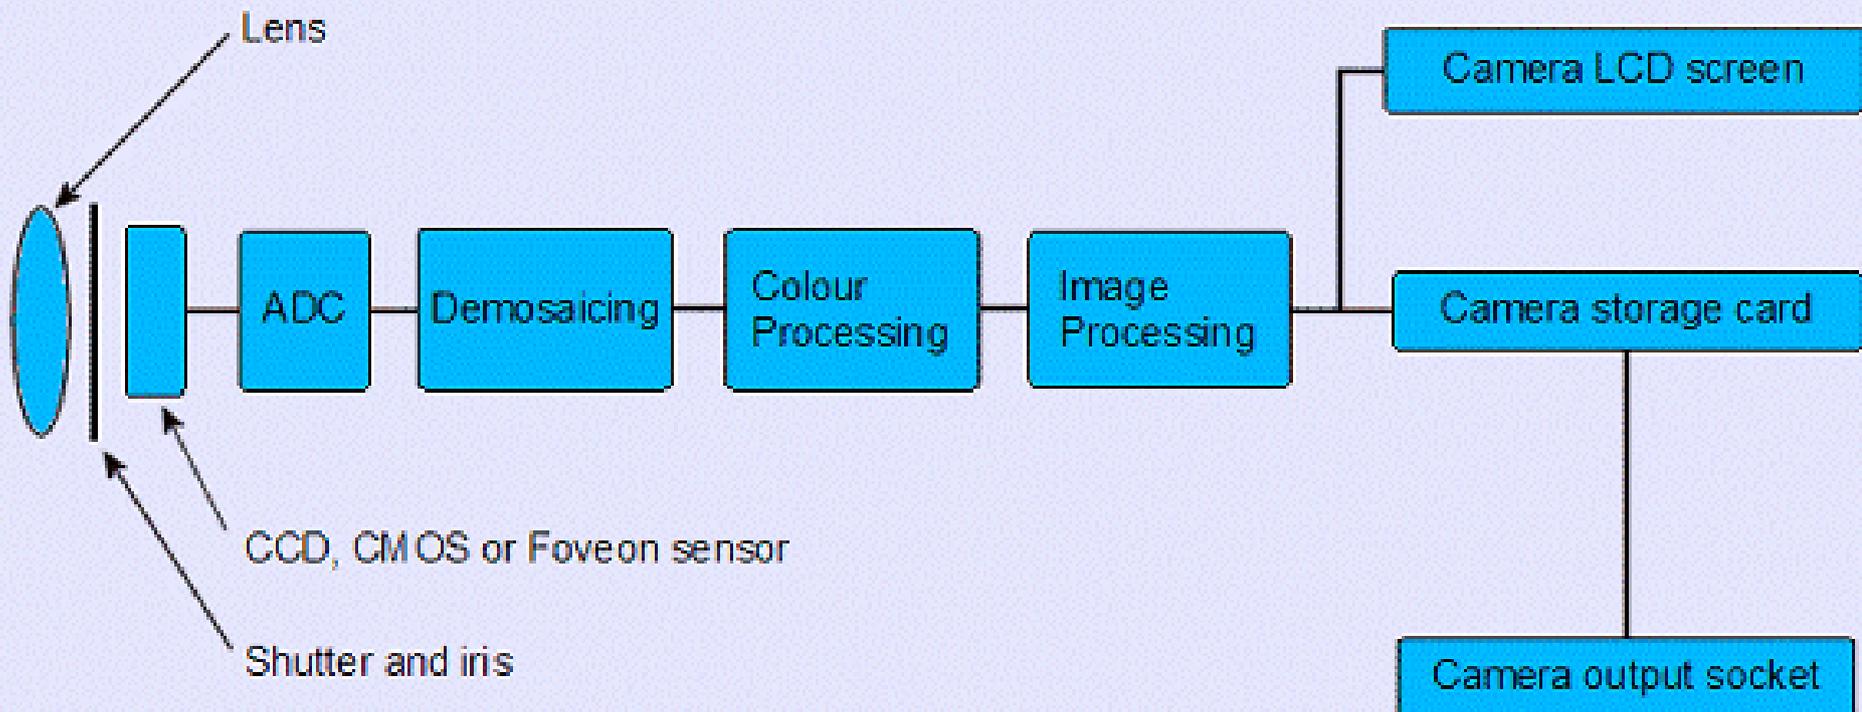


ADC refers to analogue to digital converter



0.5020	0.4941	0.4902	0.4078	0.4824	0.3608	0.2941	0.3686	0.5451	0.6431	0.4431	0.1412	0.1294	0.1255	0.1373	0.1412	0.1255	0.1176	0.1216	0.1333	0.1333
0.5020	0.4980	0.4863	0.3059	0.4510	0.3922	0.2706	0.2863	0.4745	0.5137	0.2078	0.1176	0.1098	0.1137	0.1294	0.1373	0.1294	0.1255	0.1255	0.1451	0.1412
0.5020	0.4941	0.4784	0.2392	0.3137	0.3569	0.3804	0.3451	0.3490	0.3255	0.1373	0.1451	0.1373	0.1333	0.1373	0.1373	0.1333	0.1294	0.1294	0.1529	0.1412
0.5020	0.4902	0.4627	0.2863	0.2314	0.2902	0.4392	0.4235	0.2902	0.2392	0.2078	0.1882	0.1765	0.1608	0.1451	0.1451	0.1451	0.1451	0.1412	0.1412	0.1333
0.5059	0.4784	0.4353	0.3804	0.2902	0.2627	0.3451	0.3647	0.2549	0.1804	0.1922	0.1922	0.1882	0.1725	0.1529	0.1529	0.1647	0.1647	0.1569	0.1176	0.1216
0.5098	0.4706	0.4118	0.3922	0.4196	0.3608	0.2784	0.2784	0.2353	0.1373	0.1333	0.1647	0.1725	0.1686	0.1569	0.1608	0.1686	0.1647	0.1490	0.1059	0.1333
0.5098	0.4627	0.3961	0.3333	0.5137	0.5020	0.3255	0.2863	0.2627	0.1608	0.1569	0.1451	0.1569	0.1647	0.1569	0.1608	0.1647	0.1490	0.1255	0.1059	0.1529
0.5255	0.4588	0.5255	0.3843	0.3725	0.3765	0.3098	0.2667	0.2627	0.2078	0.1961	0.1725	0.1647	0.1608	0.1686	0.1686	0.1490	0.1098	0.0784	0.1216	0.1451
0.5725	0.5529	0.5922	0.3373	0.3020	0.2863	0.2235	0.1961	0.2078	0.1804	0.1922	0.2039	0.2196	0.2196	0.1961	0.1608	0.1333	0.1333	0.1412	0.1647	0.1294
0.6157	0.6431	0.6000	0.2941	0.2627	0.2745	0.2471	0.2314	0.2235	0.1804	0.1882	0.1765	0.1843	0.1804	0.1490	0.1176	0.1059	0.1255	0.1490	0.1647	0.1686
0.6392	0.6745	0.4902	0.2588	0.2275	0.2588	0.2588	0.2588	0.2549	0.2118	0.2353	0.2157	0.1961	0.1686	0.1569	0.1529	0.1569	0.1529	0.1490	0.1647	0.2471
0.6706	0.6510	0.3412	0.2157	0.1725	0.1804	0.1569	0.1608	0.1922	0.2000	0.2471	0.2118	0.2000	0.1882	0.1804	0.1765	0.1686	0.1569	0.1490	0.2314	0.3098
0.6980	0.5765	0.2392	0.1882	0.1765	0.1882	0.1333	0.1059	0.1255	0.1176	0.1490	0.1137	0.1451	0.1725	0.1686	0.1451	0.1412	0.1725	0.2039	0.3020	0.3804
0.6941	0.4510	0.1922	0.1647	0.2039	0.2431	0.1725	0.1176	0.1255	0.0902	0.0863	0.1176	0.1490	0.1765	0.1804	0.1725	0.1961	0.2549	0.3059	0.3647	0.4431
0.6627	0.3373	0.1686	0.1373	0.1882	0.2314	0.1451	0.0980	0.1412	0.1373	0.1451	0.1922	0.1804	0.1647	0.1608	0.1843	0.2235	0.2706	0.3020	0.4314	0.4588
0.5176	0.2039	0.1098	0.1373	0.2471	0.1608	0.1176	0.1451	0.1412	0.0392	0.2157	0.1608	0.1451	0.1529	0.1804	0.2000	0.2235	0.2824	0.3412	0.3686	0.4863
0.4314	0.2235	0.1765	0.1843	0.1529	0.1294	0.2000	0.0941	0.0784	0.1922	0.0902	0.1490	0.1333	0.1451	0.1804	0.2157	0.2431	0.3020	0.3608	0.4588	0.5451
0.7647	0.8157	0.8745	0.7216	0.4196	0.1137	0.0941	0.1529	0.1255	0.1333	0.0863	0.1333	0.1216	0.1373	0.1882	0.2314	0.2706	0.3294	0.3882	0.5020	0.5725
0.8627	0.8863	0.8588	0.9255	0.8902	0.6118	0.1255	0.0157	0.1608	0.0784	0.1412	0.1255	0.1176	0.1373	0.1922	0.2431	0.2863	0.3490	0.4078	0.4980	0.5725
0.9137	0.9059	0.8431	0.8353	0.8824	0.9255	0.5922	0.0510	0.0784	0.1059	0.1176	0.1216	0.1216	0.1451	0.1961	0.2392	0.2824	0.3529	0.4196	0.5216	0.6000
0.8627	0.8863	0.8745	0.8902	0.7843	0.8118	0.9255	0.4118	0.0275	0.1020	0.1059	0.1176	0.1255	0.1529	0.1961	0.2275	0.2667	0.3490	0.4275	0.5490	0.6235

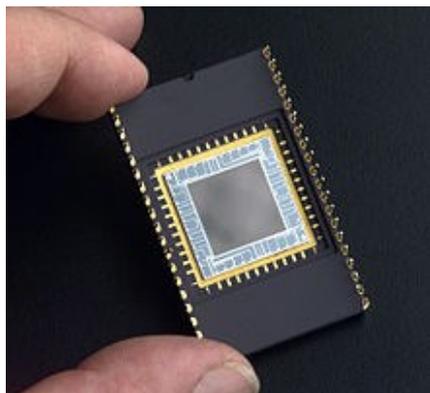


Analog to Digital Converter

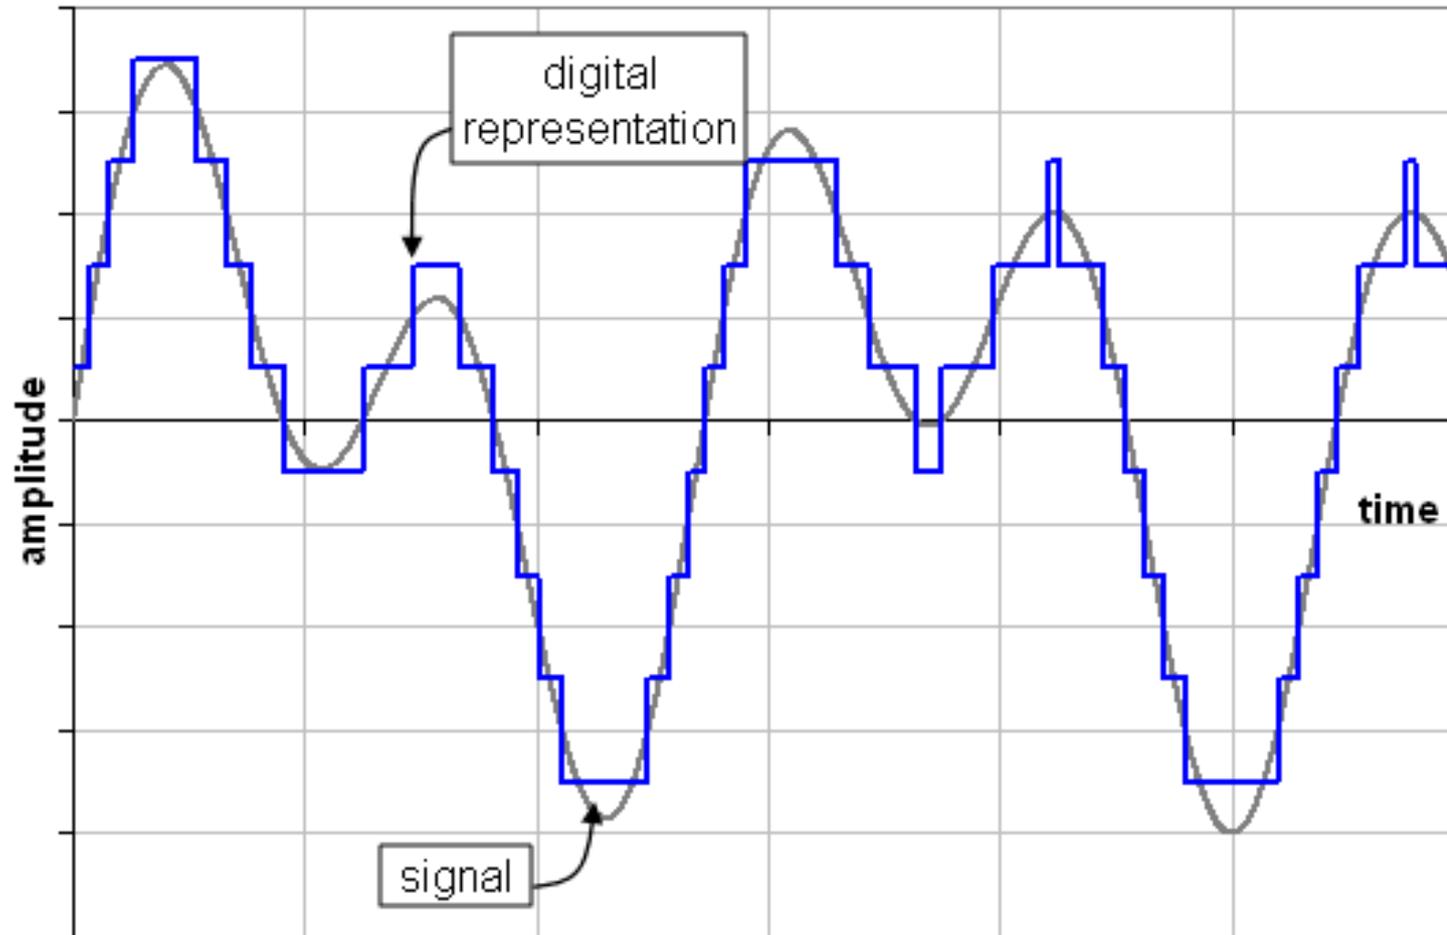


Signal Quantization

Quantization

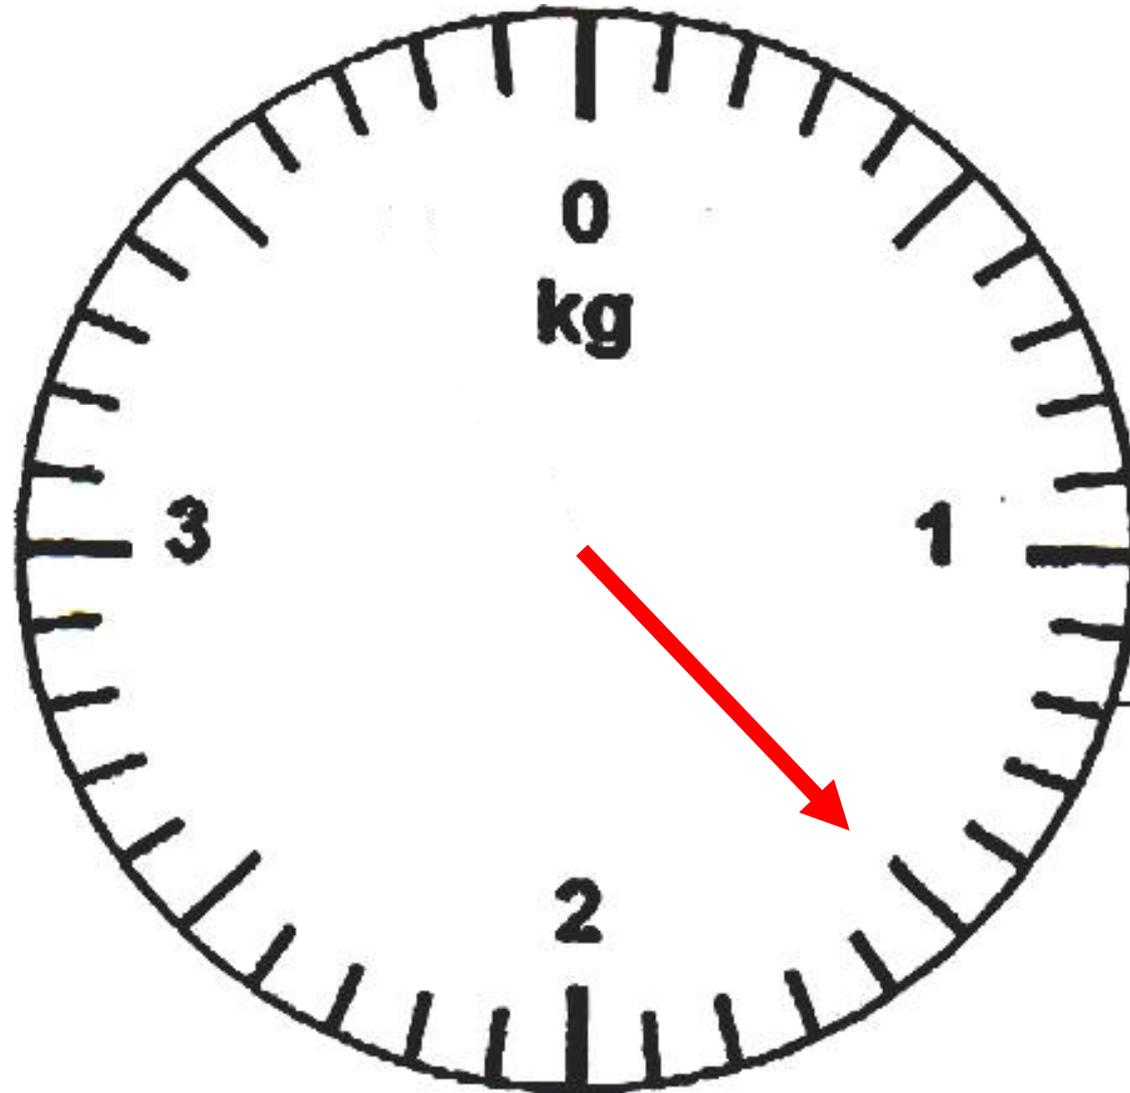

1.5 kg

Quantization

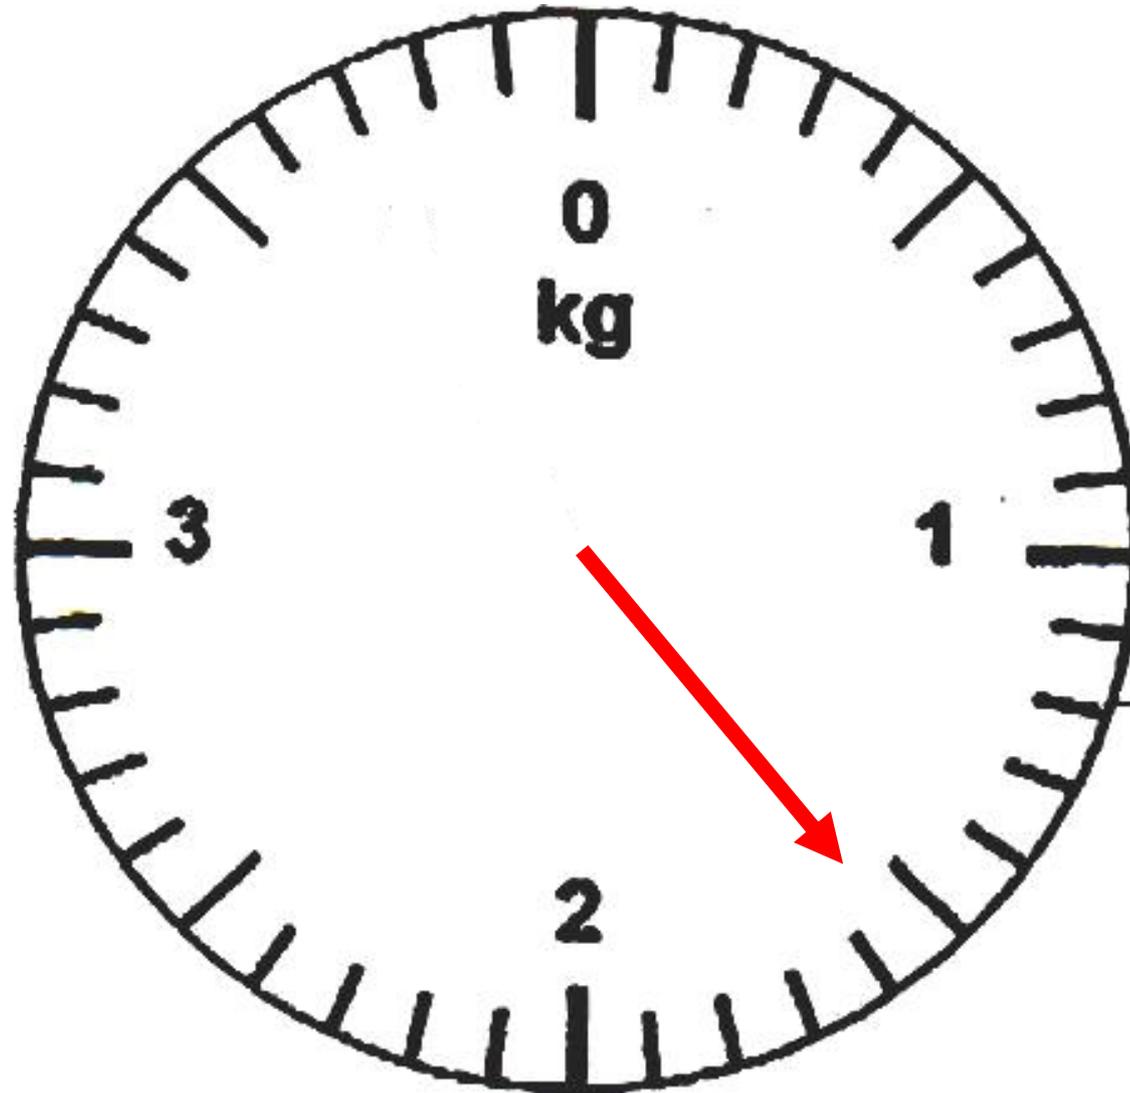

1.5 kg

Quantization

$$v = \left\lfloor \frac{v_i}{v_{ref}} \times 2^{bits} - 1 \right\rfloor$$

v = output

v_i = input

v_{max} = maximum input range


$bits$ = number of bit



1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1
1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1

Bits=1
2 levels
Binary image

Image Quantization

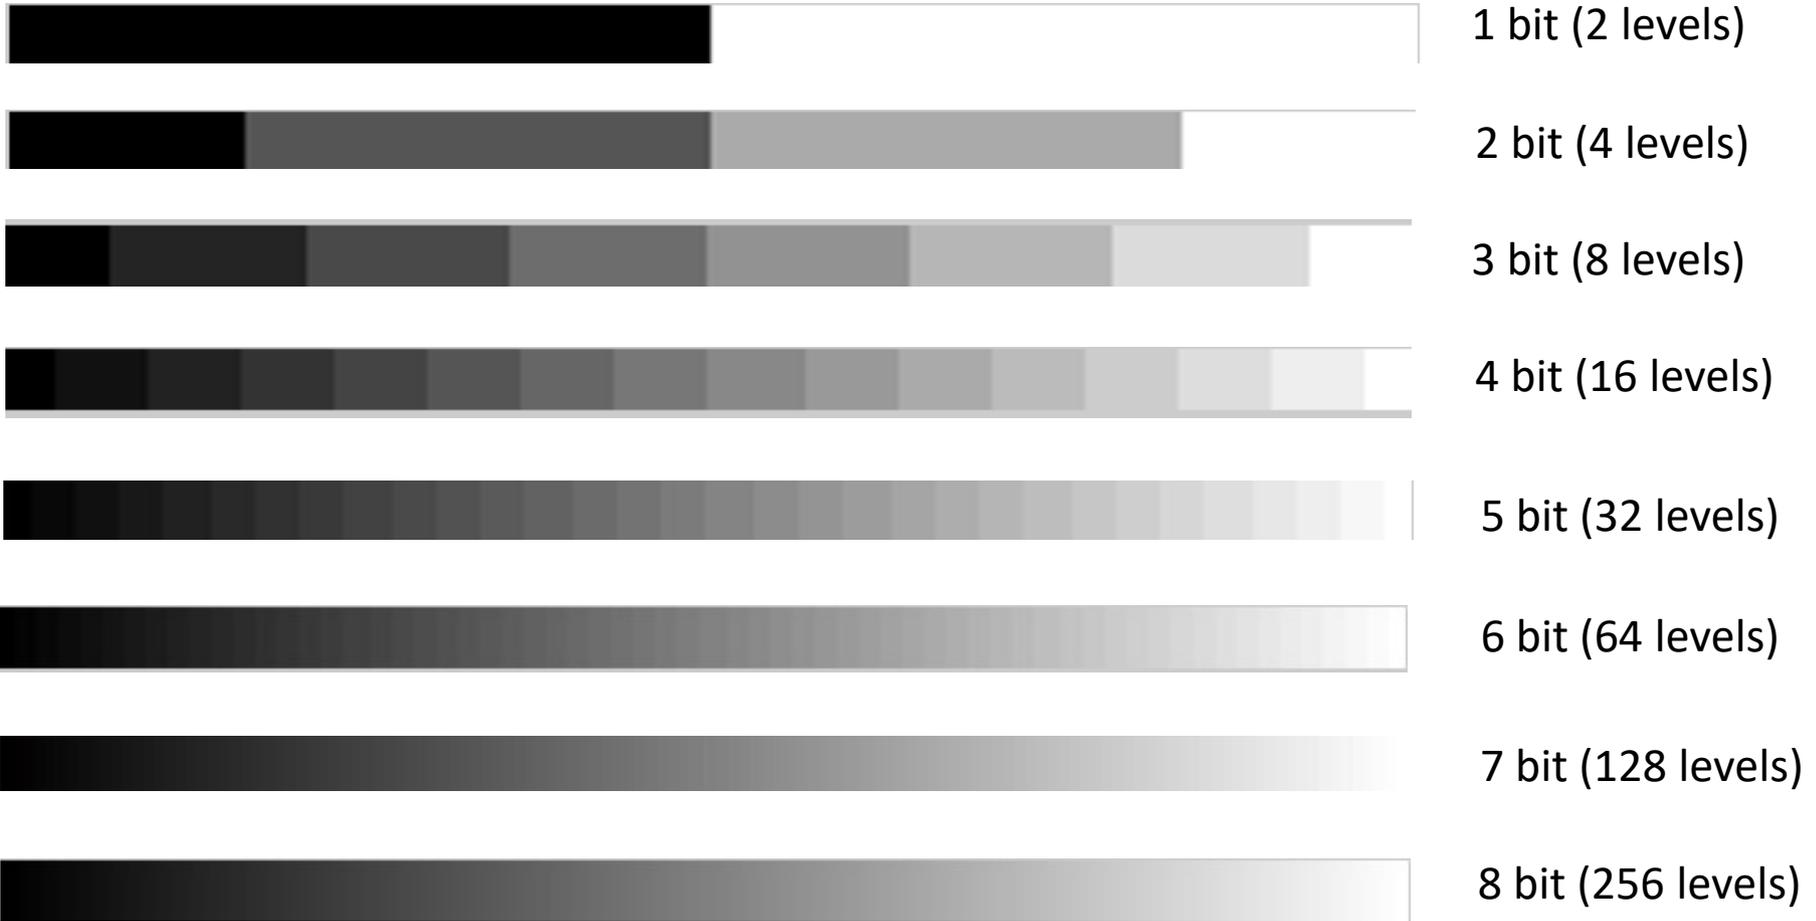

More bits = More shade

Image Quantization




1 bit (2 levels)



2 bit (4 levels)



3 bit (8 levels)

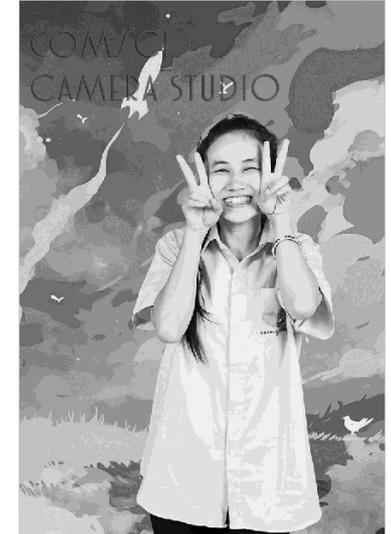

4 bit (16 levels)



5 bit (32 levels)



6 bit (64 levels)




7 bit (128 levels)



8 bit (256 levels)

More bits = More shade

Question !

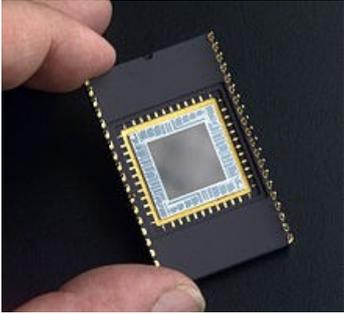

A Pixel from CCD chip have a measure value of 2 volts, this CCD has a maximum range of 5 volts.

What is the value of this pixel when it was quantize into 12 bits

$$v = ?$$

$$v_i = 2 \text{ volts}$$

$$v_{max} = 5$$

$$\text{bits} = 12$$

$$v = \left[\frac{2}{5} \times 2^{12} - 1 \right]$$

$$= 1637$$


$$= 665H$$

$$= 11001100101B$$


Image Sampling



1 x 1

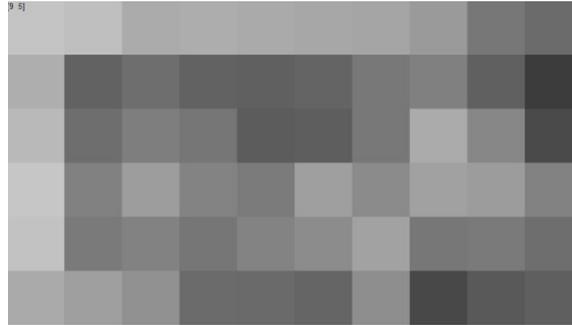

9 x 5

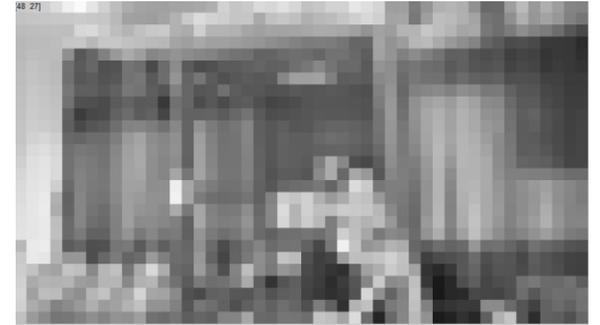

48 x 27



96 x 54




192 x 108



864 x 486

RESOLUTION OF PHOTOCHEMICAL FORMAT

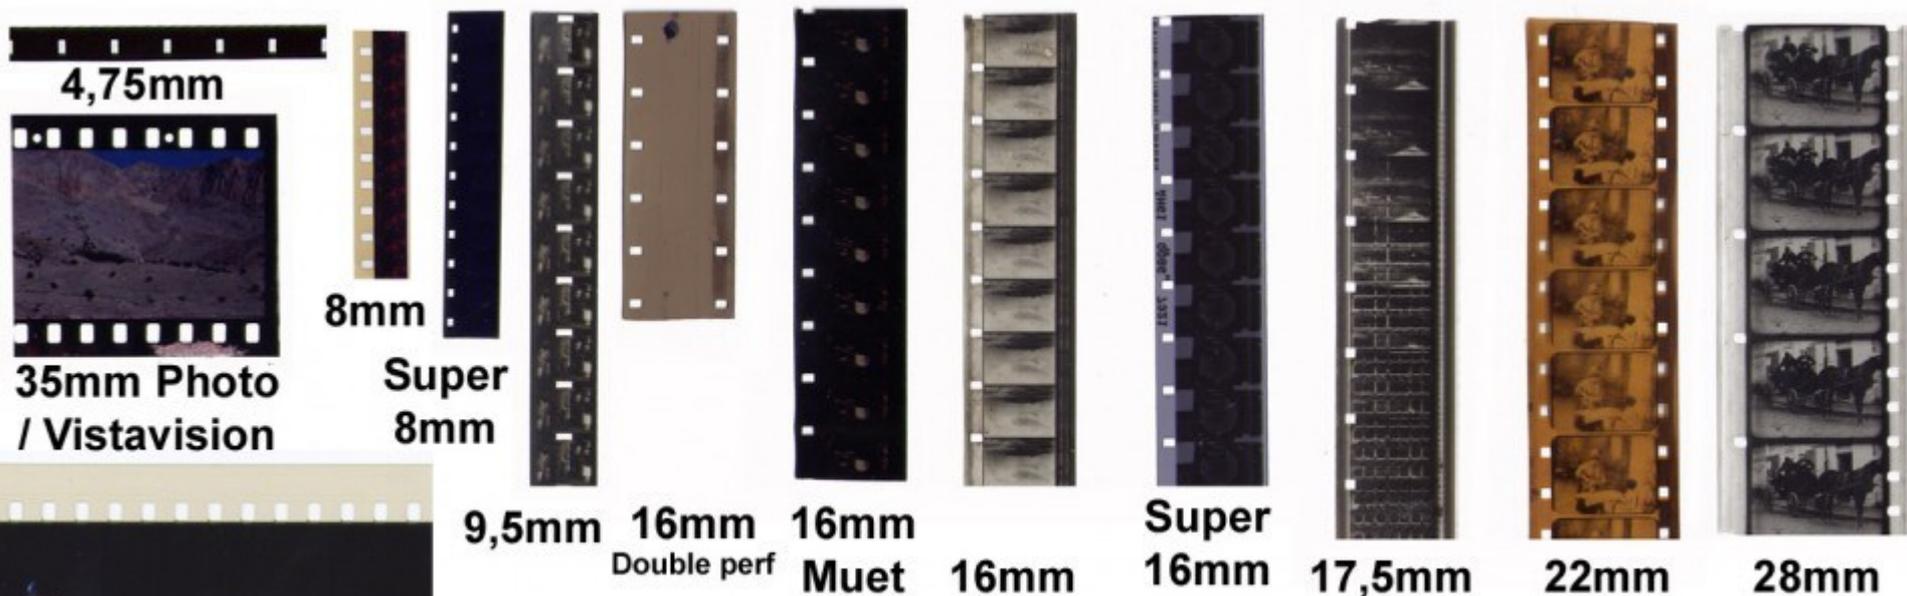

IMAX (70mm 15 perfos)




70mm (5 perfos)



35mm
Scope 2.66

35mm
Scope 2.55

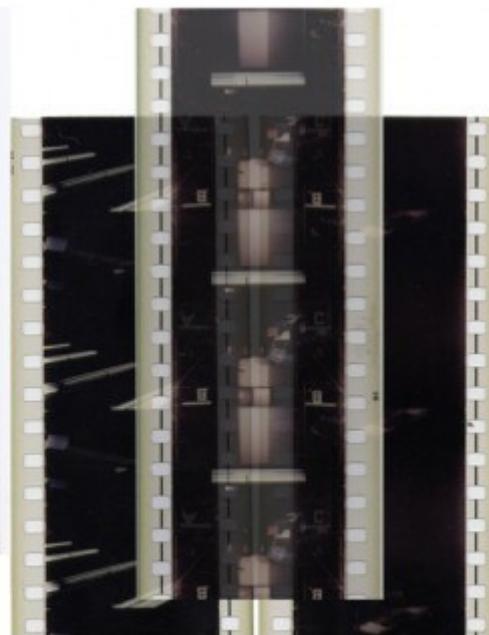


Cinerama
(3 x 35mm)



35mm
1.37

35mm
1.85
son cyan

RESOLUTION OF DIGITAL PHOTO FORMAT

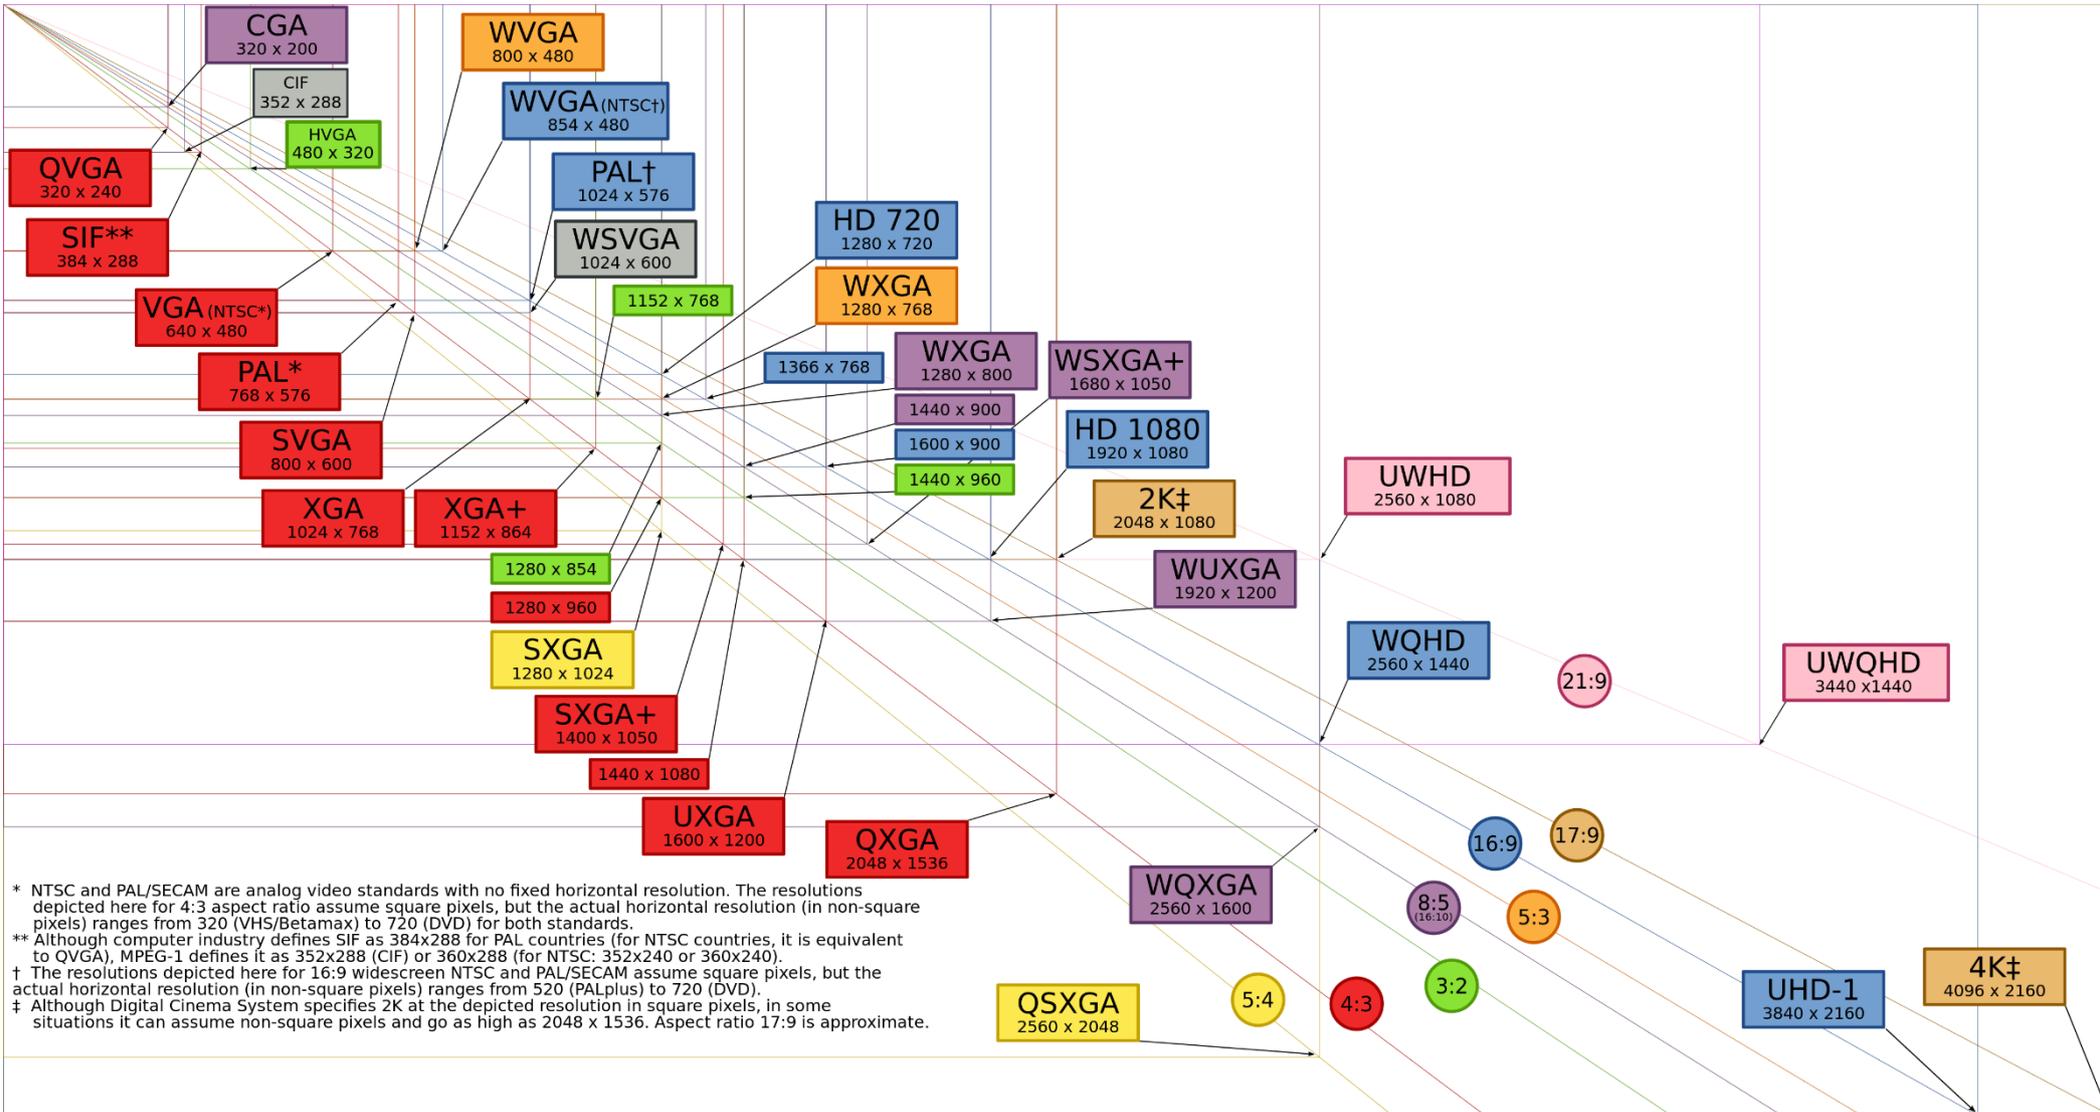


RESOLUTION CHART








RESOLUTION TEST PATTERN



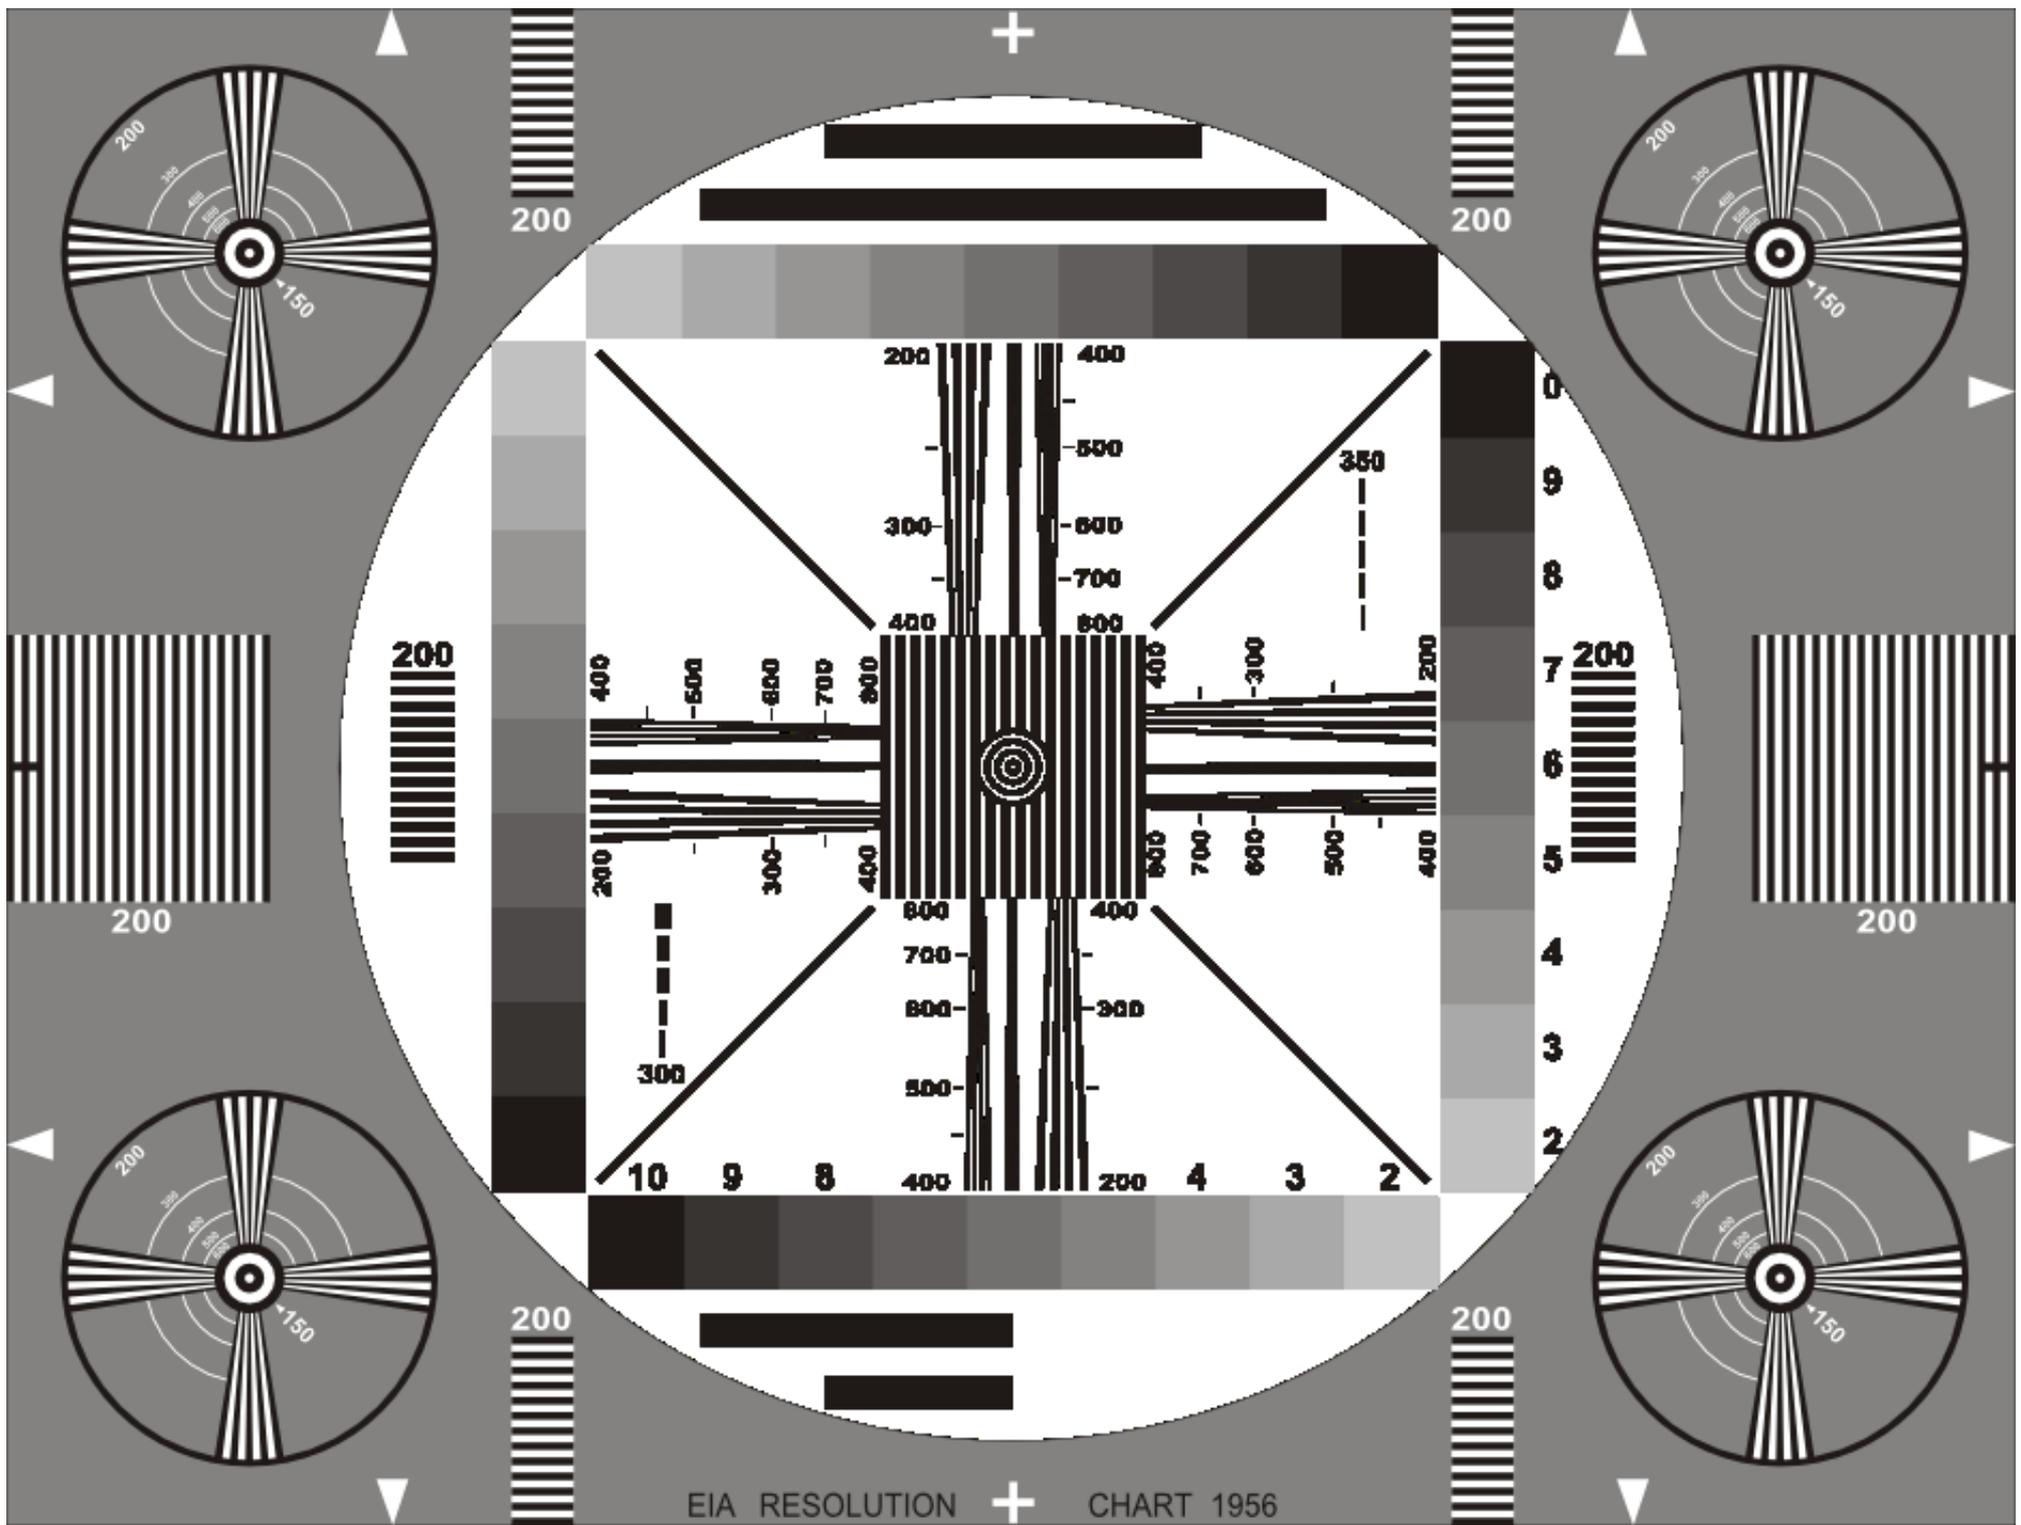

EIA RESOLUTION CHART 1956

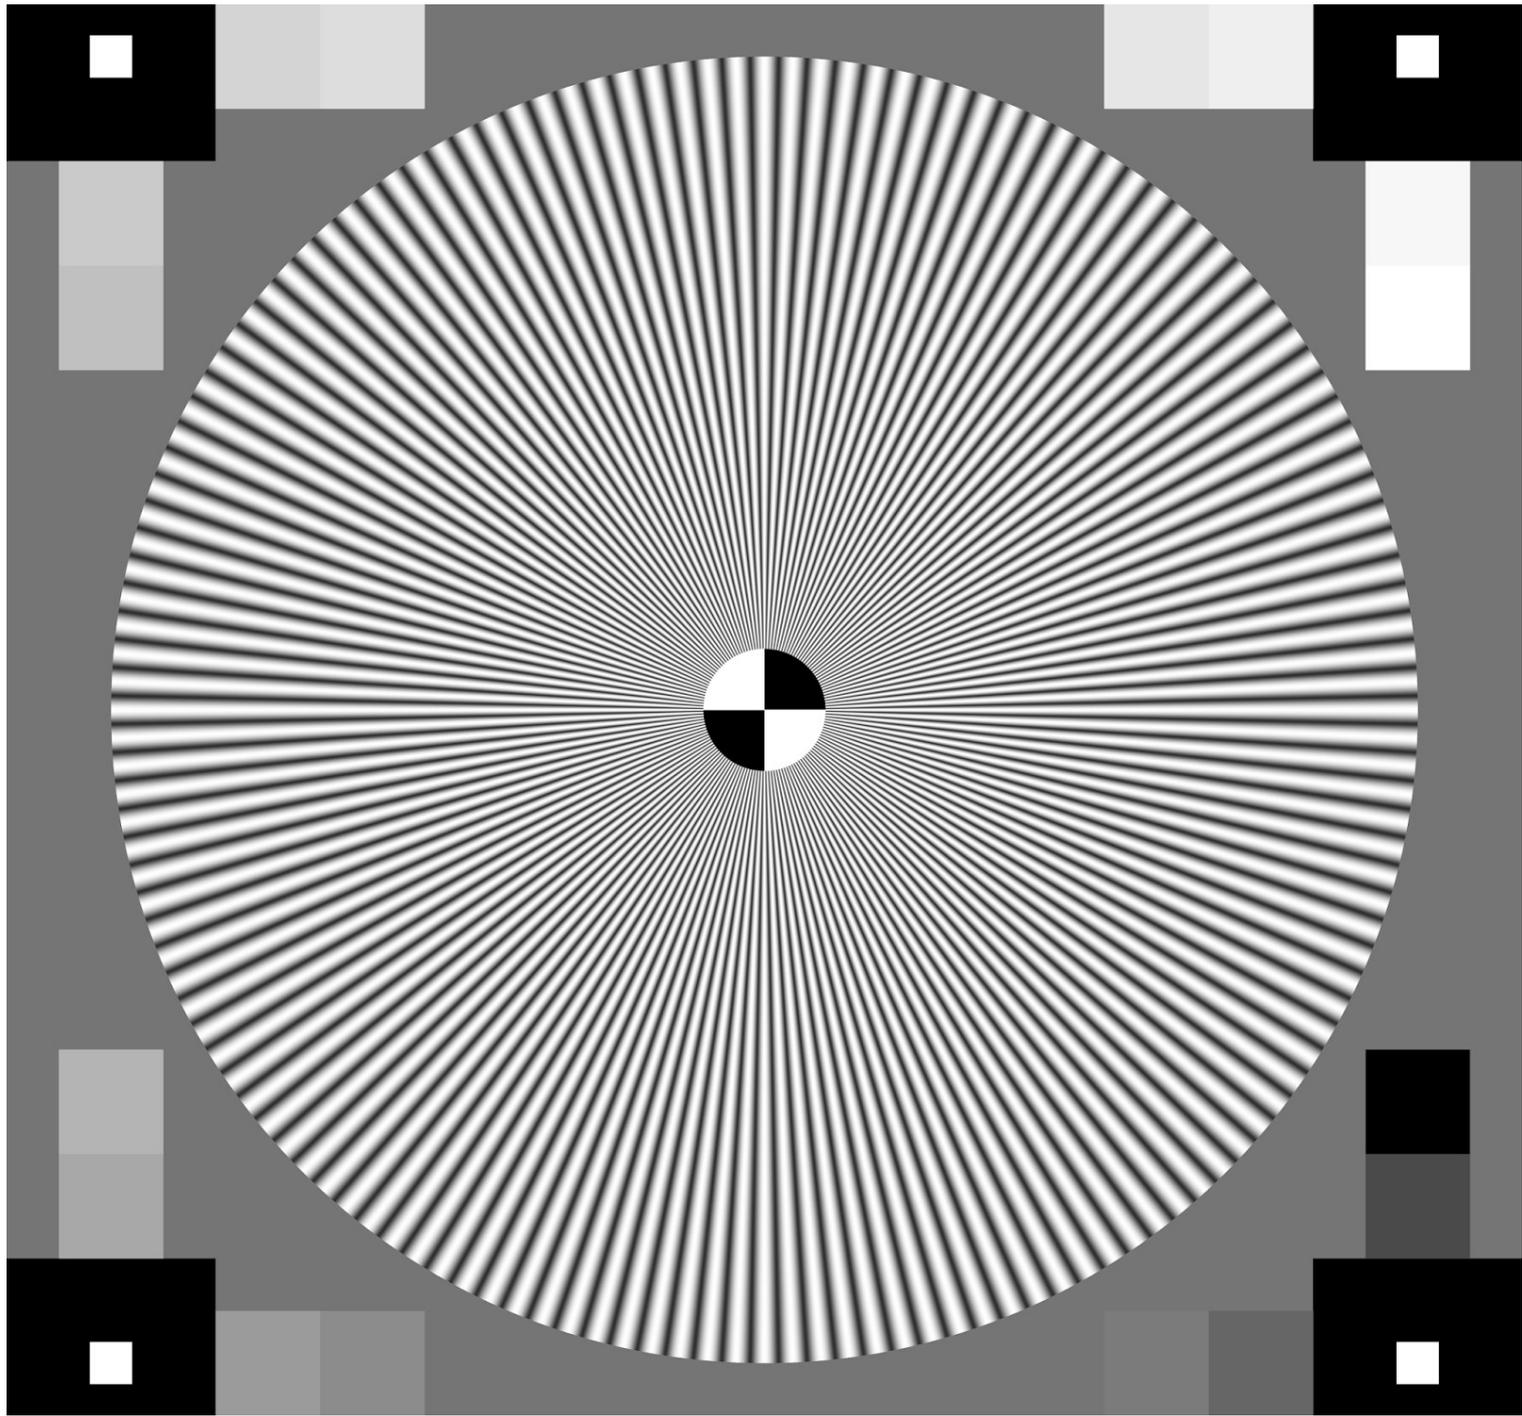

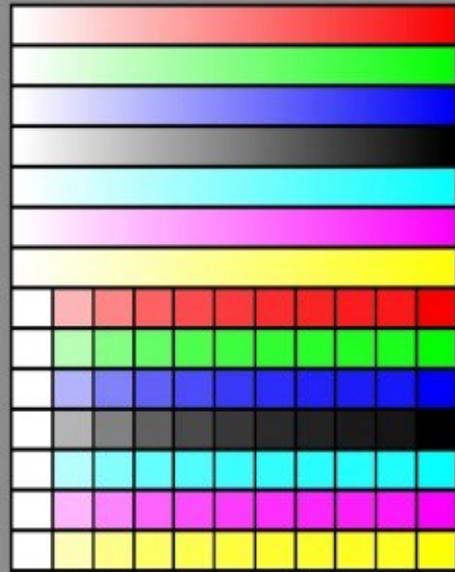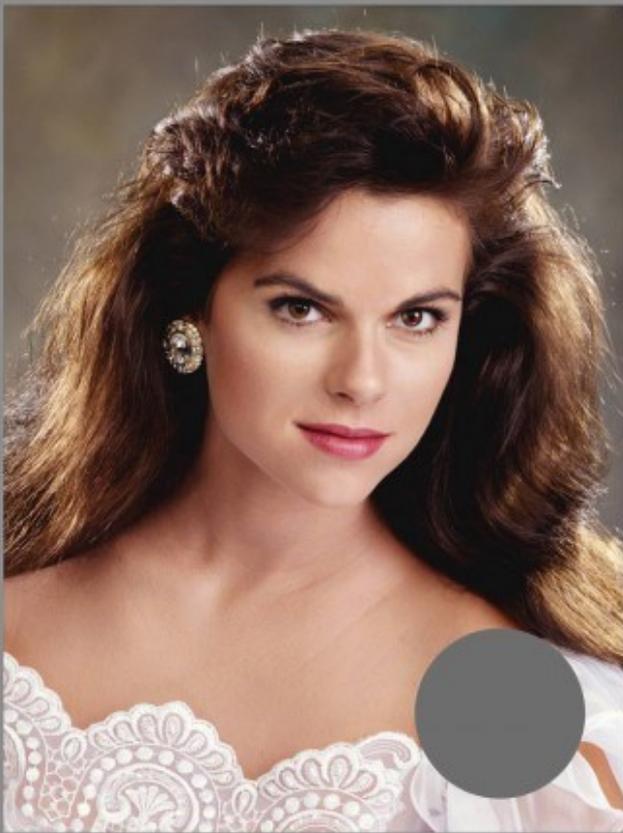


Times Roman 14 Point
Times Roman 12 Point
Times Roman 8 Point
Times Roman 6 Point

Helvetica 14 Point
Helvetica 12 Point
Helvetica 8 Point
Helvetica 6 Point

- 255
- 242
- 229
- 216
- 204
- 191
- 178
- 165
- 153
- 140
- 127
- 114
- 102
- 89
- 76
- 63
- 51
- 38
- 25
- 12
- 0




Macbeth ColorChecker™ Color Rendition Chart

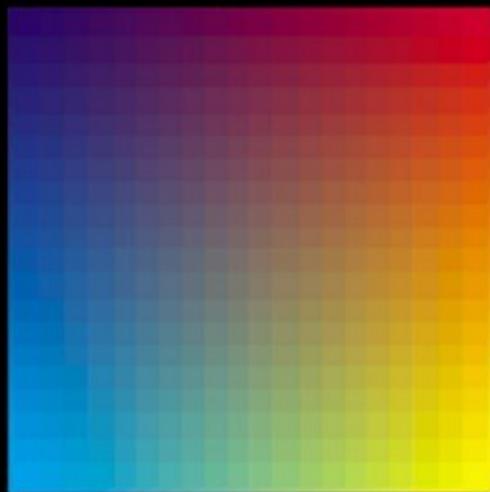

Spatial Coordinate System

	1	2	3	4
1	0	0	0	0
2	0	0	0	0
3	0	1	0	0
4	0	0	0	0
5	0	1	1	1

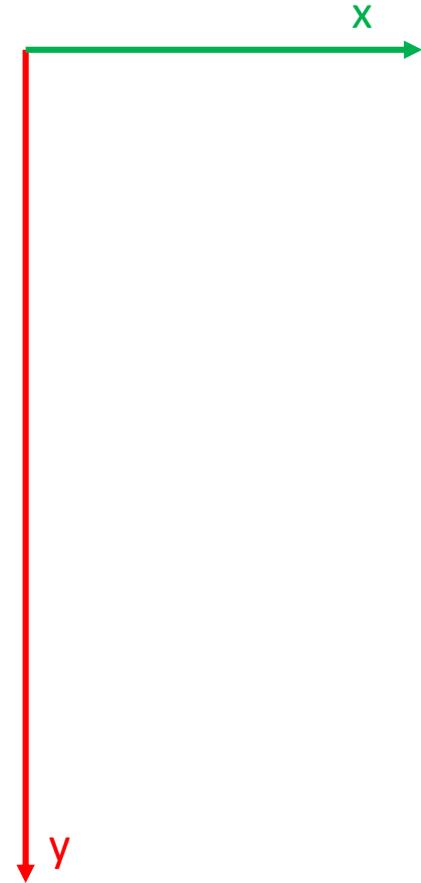

Bitmap **G**

$$\mathbf{G}(2,3)=1$$


$$x=2,y=2$$

$$\mathbf{G}(x,y)=0$$

$$\mathbf{X}=\{2,3,4\} , \mathbf{Y}=\{5,5,5\}$$

$$\mathbf{G}(\mathbf{X},\mathbf{Y})=\{1 ,1 ,1\}$$

RGB Color plane

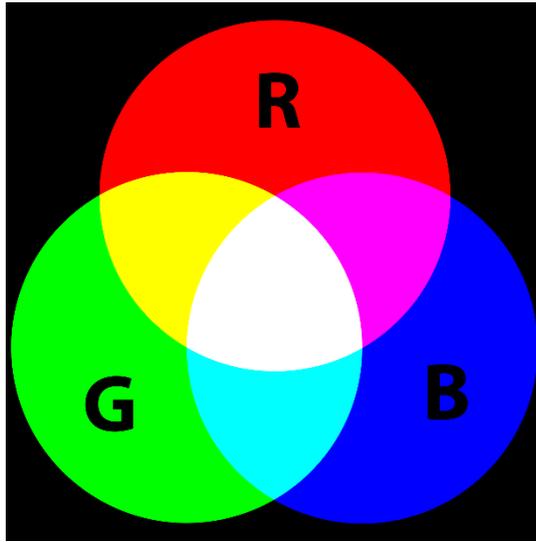

Array RGB

Page 1 - red intensity values	Page 2 - green intensity values	Page 3 - blue intensity values
0.112 0.986 0.234 0.432 ...	0.342 0.647 0.515 0.816 ...	0.689 0.706 0.118 0.884 ...
0.765 0.128 0.863 0.521 ...	0.111 0.300 0.205 0.526 ...	0.535 0.532 0.653 0.925 ...
1.000 0.985 0.761 0.698 ...	0.523 0.428 0.712 0.929 ...	0.314 0.265 0.159 0.101 ...
0.455 0.783 0.224 0.395 ...	0.214 0.604 0.918 0.344 ...	0.553 0.633 0.528 0.493 ...
0.021 0.500 0.311 0.123 ...	0.100 0.121 0.113 0.126 ...	0.441 0.465 0.512 0.512 ...
1.000 1.000 0.867 0.051 ...	0.204 0.175 ...	0.308 0.401 0.421 0.398 ...
1.000 0.945 0.998 0.893 ...	0.760 0.531 ...	0.912 0.713 ...
0.990 0.941 1.000 0.876 ...	0.997 0.910 ...	0.219 0.328 ...
0.902 0.867 0.834 0.798 ...	0.995 0.726 ...	0.128 0.133 ...
...		


RGB color format



24-BIT RGB (True color)

Sample Length:	8								8								8							
Channel Membership:	Red								Green								Blue							
Bit Number:	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

Memory Usage

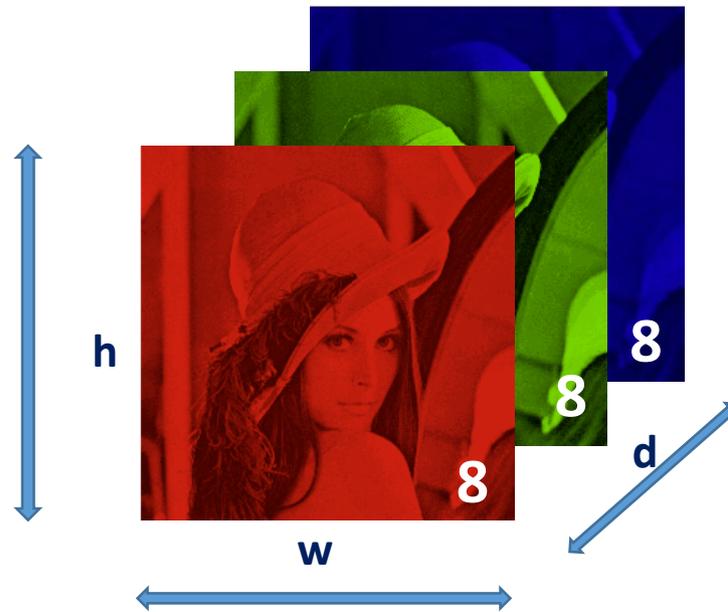

24-BIT RGB (True color)

$$\text{bytes} = \frac{\sum_{i=1}^d (h \times w) \times \text{bits}_i}{8}$$

$$\text{bytes} = \frac{(h \times w) \times 8 + (h \times w) \times 8 + (h \times w) \times 8}{8} = \frac{h \times w \times 24}{8}$$


RGB color format



16-BIT RGB (High color)

Sample Length:	5					6					5					
Channel Membership:	Red					Green					Blue					
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Bit Number:	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RGBAX						R	G	B	A	X						
Sample Length Notation:						5	6	5	0	0						

Question !



You need to load a 16-bit RGB Bitmap image with resolution of 1080 x 720 Pixels into the memory

Q1: Calculate the memory requirement for the whole image

Q2: Calculate the memory requirement only for the green plane

$$w = 1080, h = 720, d_1 = 5, d_2 = 6, d_3 = 5$$

$$\text{Sol(1)} \quad \text{bytes} = \frac{1080 \times 720 \times 16}{8} = 1.55520MB$$

$$\text{Sol(2)} \quad \text{bytes} = \frac{1080 \times 720 \times 6}{8} = 583,200kB$$

Matlab & Python image processing function

Read image file:

```
im=imread('filename');
```

Display image:

```
imshow(im);
```

Get image dimension:

```
[h w d]=size(im);
```

Resize image:

```
im2=imresize(im,[h w]);
```

Color separation:

```
R=im(:,:,1);
```

```
G=im(:,:,2);
```

```
B=im(:,:,3);
```

RGB to Gray

```
im2=rgb2gray(im);
```

Read image file:

```
im=Image.open('filename')
```

Display image:

```
imshow(im)
```

```
show()
```

Get image dimension:

```
imrgb=array(im)
```

```
[h,w,d]=imrgb.shape
```

```
[h w d]=size(im);
```

Resize image:

```
im2=imresize(im,[h ,w]);
```

Color separation:

```
im_r=im_rgb[:,:,0]
```

```
im_g=im_rgb[:,:,1]
```

```
im_b=im_rgb[:,:,2]
```

RGB to Gray

```
im2=mahotas.colors.rgb2gray(im_rgb);
```

More RGB formula

https://en.wikipedia.org/wiki/List_of_monochrome_and_RGB_palettes



Assignment



Lena Söderberg